



iFlight BLITZ F411 1S 5A Whoop AIO Board with Built-in ELRS 2.4G Receiver Wiring diagram

FC Firmware: IFLIGHT_BLITZ_F4SX1280


ESC Firmware: O-H-30 BLS 16.8

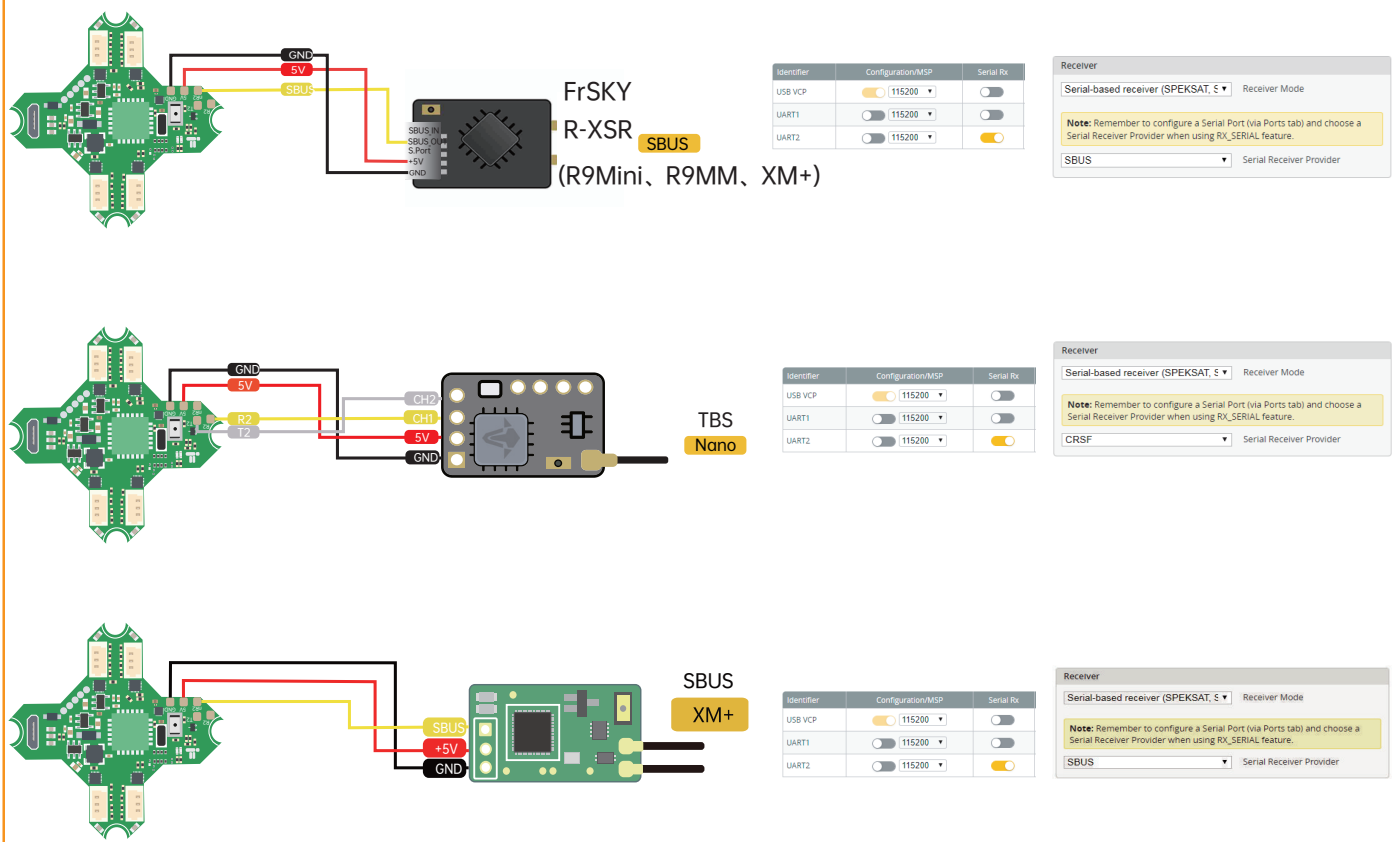


Motor

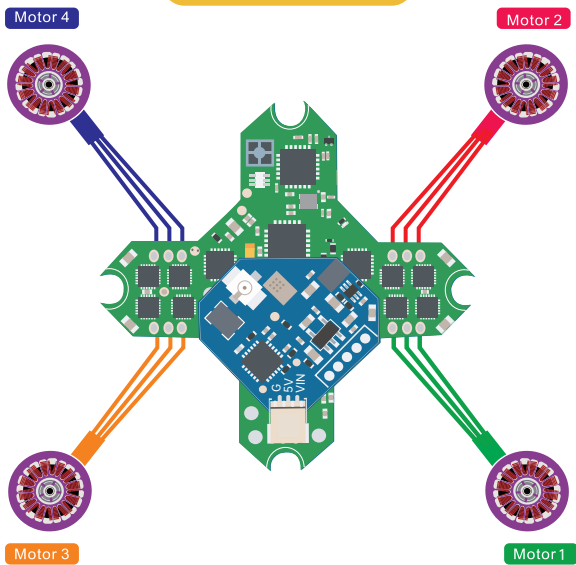

CAM

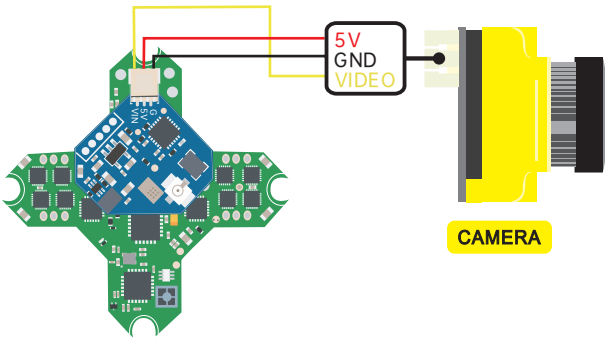

VTX

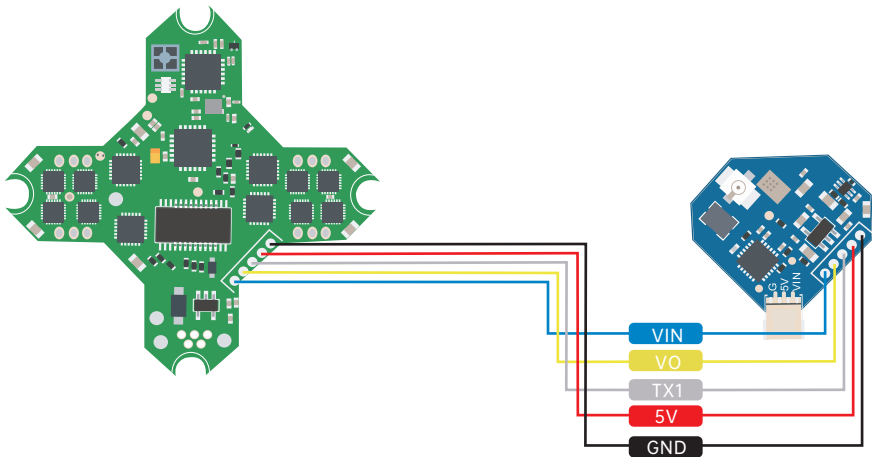

Identifier	Configuration/MSP	Serial Rx	Telemetry Output	Sensor Input	Peripherals
USB VCP	☒ 115200	☐	Disabled AUTO	Disabled AUTO	Disabled AUTO
UART1	☐ 115200	☐	Disabled AUTO	Disabled AUTO	VTX (TBS Smi) AUTO
UART2	☐ 115200	☒	Disabled AUTO	Disabled AUTO	Disabled AUTO