


Nazgul XL5 ECO

Quick Start Guide
快速入门指南

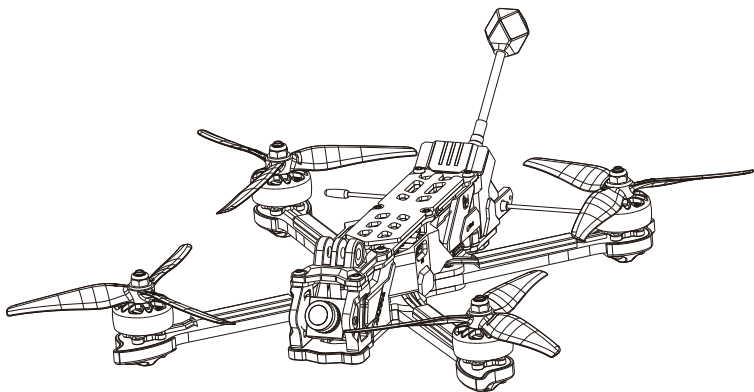

目录

Contents

Safety Warning & Disclaimer

CHS

一. 产品信息	1
二. 首次飞行准备	2
三. 飞行器设置	3
四. 桨叶安装指南	7
五. 飞行前检查	8
六. 飞行操作	9
七. GPS救援功能使用指南	9
八. 故障排除指南	10
九. 保修政策和服务信息	10

EN

1. Overview	11
2. First Flight Preparation	12
3. Aircraft Setting	13
4. Propellers Installation	17
5. Pre-Flight Check	18
6. Flight Operation	19
7. GPS Rescue Mode Instruction	19
8. Troubleshooting Guide	20
9. Warranty Policy and Service Information	20

安全飞行条款

1. 年龄建议：本产品并非玩具，具有一定的风险性，不适合未满18岁的非专业人士使用。
2. 请放置在儿童触碰范围之外，禁止儿童触碰。
3. 禁止在饮酒、疲劳、或其他精神状态不佳的情况下进行任何操作。
4. 禁止使用飞行器搭载任何违法危险物品。
5. 禁止操控飞行器进入法律法规规定的禁飞区和敏感的建筑设施附近。可能包括机场、边境线、主要城市、发电站、水电站、监狱、交通要道、政府大楼及军事设施。
6. 在进行遥控器通道校准、固件升级、参数设置前请关闭动力电源或者取下螺旋桨，防止电机高速旋转。
7. 禁止在有限高度的空域上飞行。
8. 禁止使用本产品进行任何未经授权的监视活动，侵犯他人隐私权的行为。
9. 禁止使用本产品侵犯他人物权。
10. 禁止在人口密集地区使用飞行器，这些地区包括但不限于：市区中心、体育比赛场馆、展会、演唱会，车站及临时举行活动区域。如有拍摄需求，请务必在飞行前向相关部门申请许可证。

免责声明

1. 本产品并非玩具，需要有一定的基础知识才能控制，所以要循序渐进，在开始使用前，请特别注意其中的注意与警告，惠州市翼飞智能科技有限公司(iFlight)保留更新本《免责声明与概要》的权利。
2. 在使用本产品前，请务必仔细阅读本文档，以充分了解您的合法权益、责任以及安全须知。未遵守文档中的指导可能导致财产损失、安全事故或人身伤害。通过开始使用本产品，您即表明已完全理解、接受并同意本文档的所有条款与内容，并承诺对自身行为及其所产生的一切后果承担责任。此外，您还承诺仅出于正当目的使用本产品，并同意遵守iFlight可能制定的任何相关政策和准则。
3. iFlight不为本产品提供任何形式的明示或暗示保证，包括但不限于适销性、适合特定用途或非侵权性的保证。根据适用法律的最大限度内，所有必要的服务、维修及修复费用将由您自行承担，而非iFlight。对于因未按照官方文档指导使用产品所造成的任何损失，iFlight概不负责。此外，无论是否事先告知可能发生的损害，iFlight均不对因购买、使用或无法使用本产品而导致的间接、后果性、惩罚性、偶然性、特殊性或惩戒性损害承担责任。在法律允许的最大范围内，不论基于合同还是其他形式，iFlight对您的总责任上限为您实际支付给iFlight的产品购买金额。
4. 在遵守相关法律法规的前提下，iFlight保留对上述条款的最终解释权。iFlight有权随时更新修改或终止本注意事项中的条款内容，且无需事先通知。除非本指南的下载服务被终止，否则本注意事项将长期有效。
5. iFlight是惠州市翼飞智能科技有限公司及其关联公司的注册商标。本文中提及的所有产品名称、品牌均为其各自所属公司的商标或注册商标。


警告：在使用本产品之前，请您认真阅读此手册以熟悉产品的功能。此手册包含有关安全、操作及维护的说明概要。如未正确遵循手册的操作流程，可能会造成财产损失、产品损坏或造成严重的人身伤害！

一、产品信息


飞行器描述

经典五寸花飞机型 Nazgul XL5 ECO 凝聚十年的技术沉淀，是高品质与高性价比的实力融合之作。标配强劲核心配置，专业飞控与电调系统带来稳定流畅的动力输出，高速穿梭与灵活操控皆从容应对；更以沉浸式第一视角飞行体验为核心，让每一次升空都充满自由激情。Nazgul XL5 ECO 用实力席卷飞行领域，为你开启纯粹尽兴的飞行新旅程。

外观部件




- ①摄像头 ②电机 ③螺旋桨
⑦图传 ⑧侧板+导光件 ⑨尾座



- ④天线 ⑤防滑垫 ⑥XT60
⑩接收机天线 ⑪机臂 ⑫底板

产品清单



Nazgul XL5 ECO x1



正转螺旋桨 x2



反转螺旋桨 x2



天线 x1



防滑垫x1



配件包 x1



贴纸 x1



安全提示卡 x1



免责声明 x1





售后返修卡 x1

二、首次飞行准备

注意：在进行调试之前，请务必保持无桨 / 卸桨状态。在确保对频以及 Betaflight*¹ 调试无误之后再安装桨叶。如果操作不当导致人身伤害，责任自负。请务必谨慎操作，确保安全。

1. 接收机接线指南(PNP版本)

客户可自行接TBS, ELRS等接收机（需拆卸顶板）。将接收机连接好天线 & 端子线，对插飞行器PNP预留的空机线，把接收机天线放至接收机天线孔位。

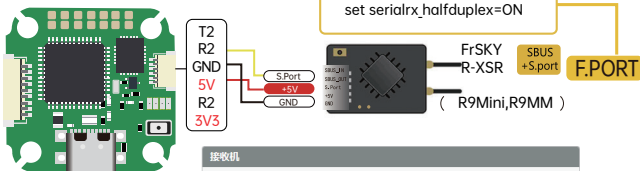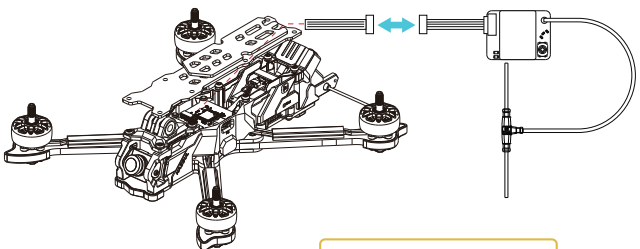

接收机


串行接收机 (通过 UART) 接收机模式

• 必须将接收机对应的 UART 设置为“数字串行接收机”(在 端口 页面)
• 从下拉列表中选择正确的数据格式, 如下:

FrSky FPort 串行数字接收机协议

遥测

TELEMETRY 遥测输出

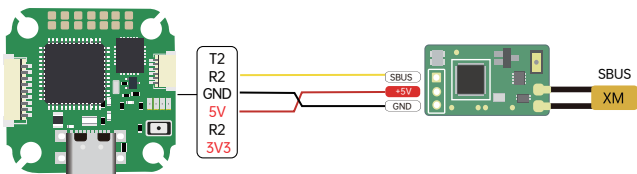


接收机

串行接收机 (通过 UART) 接收机模式

• 必须将接收机对应的 UART 设置为“数字串行接收机”(在 端口 页面)

• 从下拉列表中选择正确的数据格式, 如下:

SBUS 串行数字接收机协议

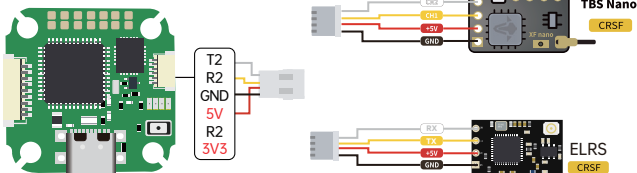

接收机

串行接收机 (通过 UART) 接收机模式

• 必须将接收机对应的 UART 设置为“数字串行接收机”(在 端口 页面)

• 从下拉列表中选择正确的数据格式, 如下:


CRSF 串行数字接收机协议

遥测

TELEMETRY 遥测输出

2.遥控器对频：接收机对频方式和步骤（ELRS+TBS）


ELRS对频方式一：使用传统方式对频（以FLIGHT Commando8 连接 ELRS900为例，其他遥控器的具体操作请参考对应遥控器的说明书）




连续插拔USB口三次：连续开机关机三次或者在未开机的状态下，通过飞控USB口给接收机通电，连续插拔USB口三次，接收机蓝灯呈持续双闪，此时接收机进入对频状态，下一步再到遥控器对频。



1.上电后，通过长按Model setup 按键来到MODELSEL界面



2.短按Next Page来到SETUP界面




3.选择并打开ExternalRF的CRSF 协议



4. 长按 System Setings 进入到 TOOLS 界面 移动光标至 ExpressLRS 选项长按 Enter 进入下一界面选项



5.光标移动至【Bind】选项，按下Enter进入对频模式。




6.对频完成后，接收机的蓝灯双闪会变成蓝灯常亮状态，此时已对频成功

[注意]

- 1.由于ELRS对频速度较快，先使接收机进入对频模式，再让遥控器进入对频模式。
- 2.对频完成后，建议给接收机重新上电。
- 3.对频时，接收机与遥控器距离要在1米以上。
- 4.接收机固件版本与高频头固件版本需保持一致，如遇到无法对频的情况可尝试把接收机和高频头固件升级到最新的固件，再尝试对频。
- 5.如遇到无法对频情况，可尝试重启遥控器与接收机。

ELRS对频方式二：绑定短语对频与传统方式对频



如果你正在刷写接收机与高频头固件，只需要设置好绑定短语即可直接将接收机与高频头绑定，无需使用传统方式对频。在Custom binding phrase中设置你的绑定短语。注意！绑定短语内容必须具有唯一性，不要设置简单的绑定短语，否则在ELRS信号范围内同样绑定短语的设备将会被绑定。

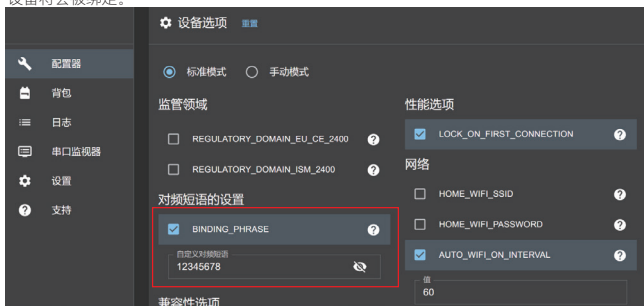


具体操作流程请参考EXPRESSLRS官网中的快速上手教程，或 iFLIGHT 官方哔哩哔哩账号视频教程。

TBS对频方式：按键对频

将飞行器连接电源 / 电池 飞行器正常自检后，用镊子短按一下 TBS 接收机 BOOT 按键，绿灯闪烁表示进入对频模式，黑羊遥控器或黑羊高频头设置页面进入高频头页面，找到【Bind】选项点击确认进入对频，对频成功后 TBS 接收机指示灯为绿灯常亮。



三、飞行器设置

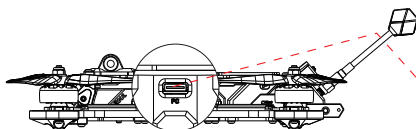

下载 Betaflight configuration*1 后
连接飞控 USB

a. 接收机端口/协议

ELRS/TBS接收机：CRSF

标识符	设置/MSP	串行数字接收机	遥测输出
USB VCP	115200	☐	已禁用 AUTO
UART1	115200	☐	已禁用 AUTO
UART2	115200	☒	已禁用 AUTO
UART3	115200	☐	已禁用 AUTO
UART4	115200	☐	已禁用 AUTO
UART6	115200	☐	已禁用 AUTO
UART7	115200	☐	已禁用 AUTO

接收机

串行接收机 (通过 UART)

接收机模式

• 必须将接收机对应的 UART 设置为“数字串行接收机”(在 端口 页面)

• 从下拉列表中选择正确的数据格式, 如下:

CRSF

串行数字接收机协议

遥测

☒

TELEMETRY 遥测输出

b. 通道映射设置

接收机通道映射: “AETR1234” 美国手-左手油门; “TAER1234” 日本手-右手油门

设置

端口

配置

动力 & 电池

预设

FID 调校

接收机

模式

电机

OSD 屏幕叠加显示

固件(VTX)

黑盒子

CLI(命令行)

预览

横滚 (A)

1.00

俯仰 (E)

1.00

方向 (R)

1.00

油门 (T)

885

AUX 1

1.00

AUX 2

1.00

AUX 3

1.00

AUX 4

1.00

AUX 5

1.00

AUX 6

1.00

AUX 7

1.00

AUX 8

1.00

AUX 9

1.00

AUX 10

1.00

AUX 11

1.00

AUX 12

1.00

接收机

串行接收机 (通过 UART)

接收机模式

• 必须将接收机对应的 UART 设置为“数字串行接收机”(在 端口 页面)

• 从下拉列表中选择正确的数据格式, 如下:

CRSF

串行数字接收机协议

遥测

☒

TELEMETRY 遥测输出

RSSI (接收机信号强度)

☐

RSSI_ADC 模拟 RSSI 输入

通道映射

AETR1234

RSSI 通道

已禁用

舵机低位 阈值

舵机中点

舵机高位 阈值

1050

1500

1900

RC 死区时间

Yaw 死区时间

3D 油门死区

0

0

50

RC 平滑

开

平滑模式


刷新

保存


c. 接收机端口/协议

飞行器默认出货为自稳，客户也可自行设置其他模式。

ARM：解锁/上锁通道开关，用于飞行器的解锁与上锁，默认出厂设置为AUX1，低位为上锁，高位为解锁。图标亮起表示解锁，图标呈现灰色表示上锁。




ANGLE：自稳通道开关，用于飞行器开启自稳飞行模式，默认出厂设置为AUX2该模式全程保持开启状态。图标亮起表示开启自稳模式，图标呈现灰色表示非自稳模式。



四、螺旋桨安装指南

CW 顺时桨 & CCW 逆时桨，用户需根据桨叶表面的方向标识，区分桨叶方向，安装至飞行器。



注意 ⚠

- ◆ 拆装桨叶时，请确保飞行器处于断电状态。
- ◆ 由于桨叶较薄，请小心操作以防意外划伤。
- ◆ 螺旋桨为易损耗品，如有需要，请另行购买。
- ◆ 每次飞行前请检查螺旋桨是否安装正确和紧固。每次飞行前请务必检查各螺旋桨是否完好。如有老化、破损或变形，请更换后再飞行。
- ◆ 请勿贴近旋转的螺旋桨和电机，以免割伤。
- ◆ 本产品不适合未满18岁的非专业人士使用。

五. 飞行前检查

警告：在进行任何调试、维护或故障排除之前，请务必保持无桨 / 卸桨状态。在确保对频以及 Betaflight*¹ 调试无误之后再安装桨叶。如果操作不当导致人身伤害，责任自负。请务必谨慎操作，确保安全。

每次飞行前，请对以下内容进行检查。


1. 必须正确安装天线才能上电
 2. 检查使用的电池电量是否充足且健康，确保电池无明显破损、变形或泄露现象。
 3. 确认电池型号与飞行器兼容，电压规格正确（比如对于 6S 电池，应为 22.2V 左右）。
 4. 检查电池插头与飞行器电池插座接触良好，无松动、污物或损坏情况。
 5. 遥控器开启并已与飞行器正确对频，确认接收机指示灯正常闪烁或显示已连接。
 6. 确保电机旋转方向正确，拆卸桨叶后，在地面站的电机页面推动油门确认。
 7. 确认螺旋桨安装方向，确定螺丝螺母不会松动。
 8. 确保起飞地点空旷无障碍物，远离人群和贵重物品，以防止意外失控造成的损失。
 9. 如果是首次飞行或重大升级后，建议先进行地面测试，确认所有功能正常后再进行空中飞行。
- 通过以上这些预防性检查，可以有效降低因疏忽导致的飞行事故，保证飞行器的安全运行。

六. 飞行操作

1. 遥控器基本操作

使用遥控器摇杆可控制飞行器飞行，遥控器摇杆操控方式主要分为日本手、美国手，下图以美国手 (Mode 2) 为例。更多信息详见遥控器说明书。

左摇杆




右摇杆

头部往下倾斜，飞机往前平移



尾部往下倾斜，飞机往后平移

左摇杆



右摇杆



2. 飞行步骤

注意：在操作飞行器前，请查询当地的法律和条款。在某些地区，飞行器的使用可能会受到限制或禁止。飞行时需严格遵守当地法律法规，您将对所有违反当地法律法规的飞行行为负责。

2.1 起飞步骤：

需要目视飞行器同时将油门(throttle)推至最低位置，然后慢慢提升油门，使飞行器离地约10-20厘米。观察飞行器的姿态稳定后，收油门遥控器上锁。确认飞行器工作正常后再带上FPV飞行眼镜，或者使用专用监视设备进行飞行，解锁缓慢提高油门，使其平稳升空。

2.2 降落步骤：

1. 降低高度，在降落前，先将飞行器逐渐降低至合适高度，保持稳定的飞行速度和姿态。
2. 靠近降落点，控制飞行器慢慢接近预先选好的降落区域，尽量采用滑翔方式接近，才能更好控制距离点位。
3. 减小油门，缓慢减少油门输出，让飞行器缓慢下降。
4. 接触地面或距离地面5-10厘米即可上锁，小心周围环境避免硬着陆损坏。
5. 降落地面后请立即对无人飞行器进行断电操作。

注意事项：

- 电池电量过低，飞行中可通过查看FPV飞行眼镜或监视器中的OSD信息判断电池剩余电量，飞行过程中需自行判断剩余飞行时间并留足冗余作为安全降落电量，当电池单片电芯电压接近3.7V时需要注意返航降落，过度放电会对电池造成不可逆的损坏。
- 观察四周，在降落前再次确认周围环境安全，没有人员或动物进入降落区。
- 降落地面后优先将无人飞行器设备断电，避免误触遥控器开关使其再次解锁从而避免发生事故和人身伤害。

七、GPS救援功能使用指南（非标配）*2

设置GPS时，请连接飞行器电池，以确保GPS可在Betaflight *1中正常设置。

1. 若本飞行器已预装GPS，GPS救援模式请参考《GPS救援模式注意事项》进行设置。

2. 救援触发操作：

- ① 若飞行器已经自动触发GPS救援，飞回来后想要手动接管仅需拨动左右任意一个摇杆接管，而不是拨打GPS救援开关。
- ② 当飞行器因手动触发救援开关返航，且飞回到可接管范围时，则需再次操作救援开关以重新接管控制。

若自动触发救援模式后，遥控器接管成功再手动拨动开关，会导致GPS救援再打开，若在没有达到救援条件的时候，会导致上锁掉落。

注：在启用GPS救援模式及开始使用飞行器前，请熟读《GPS救援模式注意事项》中所有注意事项。

八、故障排查指南

问题	可能原因	解决方案
遥控器打杆，飞行器无反应	接收机协议设置与实际不符	检查接收机协议设置是否和接收机所连接的串口一致
	模式设置有冲突导致解锁失败	检查地面站模式设置是否有重复
	接收机通道预设与和遥控器的通道预设不一致	检查并设置使接收机通道映射和遥控器的通道映射一致
	飞行器在倾斜角度下	检查地面站配置页面的最大解锁角度
	油门通道过高	将油门杆拉到最低，或者检查通道序号正不正确
	已配置GPS救援模式但搜星不成功或所需的卫星数量不足	等待GPS定位成功或禁用GPS救援模式

GPS救援模式不触发	飞行距离未超过100米	飞行器飞到100米外后 才能达到触发条件
飞行器起飞即翻滚或 无法起飞	螺旋桨安装错误	检查螺旋桨的安装是 否正确
飞行器起飞后电机存 在异响	螺旋桨松动	拧紧螺旋桨的螺母
	螺旋桨轴心损坏	更换螺旋桨

九、保修政策和服务信息

请浏览 iFlight 官网 <https://www.iflight.cn/warranty-policy-info11> 以了解最新的售后保修信息。

惠州市翼飞智能科技有限公司

电话: +86752-3866-695

邮箱: support@iflight.com

网址: www.iflight.com

地址: 惠州仲恺高新区陈江街道仲恺六路333号

星河仲恺人工智能产业园B2栋厂房第5-6层




 关注iFlight官方账号，获取更多技术支持

注:

*1: Betaflight configuration 是飞行器飞控调参软件，请通过以下地址下载。

<https://betaflight.com/download>

*2: GPS 为选配产品，需另行购买。

Safe Flying Guidelines

1. Age Recommendation: This product is not a toy and has certain risks. It is not suitable for non-professionals under the age of 18.
2. Please keep out of reach of children. Children are prohibited from touching it.
3. DO NOT operate under the influence of alcohol, fatigue, or other impaired mental states.
4. DO NOT use the aircraft to carry any illegal or dangerous goods.
5. DO NOT operate the aircraft in no-fly zones and near sensitive buildings and facilities stipulated by laws and regulations. These may include airports, borderlines, major cities, power plants, hydroelectric stations, prisons, transportation hubs, government buildings, and military facilities.
6. Before performing remote control channel calibration, firmware upgrades, or parameter settings, please turn off the power supply or remove the propellers to prevent the motor from rotating at high speed.
7. DO NOT fly in airspace with limited altitude.
8. DO NOT use this product for any unauthorized surveillance activities or to infringe on the privacy of others.
9. DO NOT use this aircraft to infringe on the property rights of others.
10. DO NOT use the aircraft in densely populated areas, including but not limited to: city centers, sports stadiums, exhibition venues, concert halls, stations, and temporary event areas. If there is a filming requirement, be sure to apply for a permit from the relevant authorities before flying.

Disclaimer

1. This product is not a toy and requires basic knowledge to control. Therefore, it is important to proceed gradually. Before using the aircraft, thoroughly read this manual and the Disclaimer and Safety Guidelines for important notes and warnings. Huizhou iFlight Innovation Technology Ltd. (iFlight) reserves the right to update this Disclaimer.
2. Before using this aircraft, be sure to read this document carefully to fully understand your legal rights, responsibilities, and safety precautions. Failure to comply with the instructions in the document may result in property damage, safety accidents, or personal injury. By starting to use this product, you indicate that you fully understand, accept, and agree to all the terms and contents of this document, and you undertake to be responsible for your own actions and all consequences arising therefrom. In addition, you also promise to use this aircraft only for legitimate purposes and agree to comply with any relevant policies and guidelines that iFlight may formulate.
3. iFlight shall not be liable for any loss or damage resulting from improper use of the product that does not follow official documentation. To the fullest extent permitted by law, iFlight disclaims all liability for any indirect, consequential, punitive, incidental, or special damages arising from the purchase or use of this product, whether or not such damages were foreseeable. iFlight's total liability shall in no case exceed the amount actually paid for the product.
4. Subject to applicable laws and regulations, iFlight reserves the right of final interpretation of the above terms. iFlight may update, modify, or terminate any part of this notice at any time without prior notice. Unless the download service for this guide is discontinued, this notice shall remain in effect indefinitely.
5. iFlight is a registered trademark of Huizhou iFlight Innovation Technology Ltd. and its affiliates. All product names and brands mentioned herein are trademarks or registered trademarks of their respective companies.



Warning: Before using the aircraft, thoroughly read this manual for important notes and warnings. This manual contains important safety, operation, and maintenance instructions. Failure to follow proper usage may result in damage, injury, or product malfunction.

I. Overview

Introduction


The classic 5-inch freestyle FPV drone, Nazgul XL5 ECO, embodies a decade of technical expertise, representing a powerful fusion of high quality and cost-effectiveness. Equipped with a robust core configuration, its professional flight controller and ESC system deliver stable and smooth power output, easily handling both high-speed maneuvers and agile control. Centered around an immersive first person view flying experience, it ensures that every takeoff is filled with freedom and passion. With its strength, Nazgul XL5 ECO sweeps across the flying world, opening a new journey of pure and exhilarating flight for you.

Appearance Components



- ①Camera ②Motor ③Propeller ④Antenna ⑤Anti-slip pad ⑥XT60
⑦Air unit ⑧Side panel + LED strip ⑨TPU antenna mount ⑩Receiver antenna
⑪Arm ⑫Bottom plate

Packing List



Nazgul XL5 ECO x1



CW propeller x2



CCW propeller x2



Antenna x1



Battery pad x1



Accessory pack x1



Sticker x1



Safety warning card x1



Disclaimer x1



After sales service card x1

II. First Flight Preparation


Note: Before activation, please make sure the propellers are removed. The propellers can only be installed after the aircraft binding and Betaflight*¹ settings are completed.

If improper operation results in personal injury, you will be solely responsible for it. Please operate with caution to ensure safety.

1. PNP Wiring Instruction

Customers can connect TBS, ELRS, etc. by themselves (requires removing the top plate).

Connect the receiver to the antenna and wires, plug them into the PNP reserved wires. Place the receiver antenna into the receiver antenna mount.

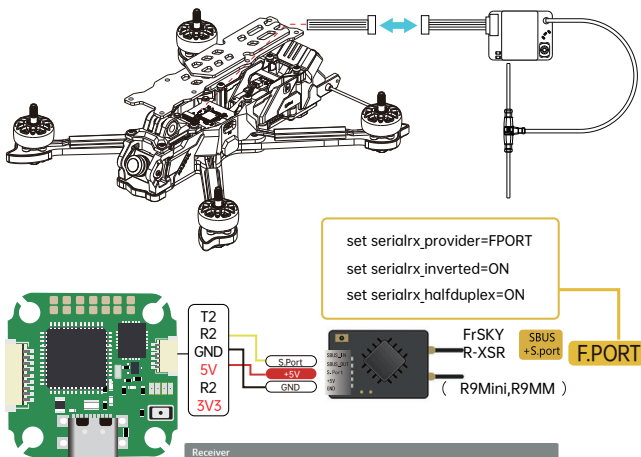

Receiver


Serial (via UART) Receiver Mode

• The UART for the receiver must be set to 'Serial Rx' (in the Ports tab)
• Select the correct data format from the drop-down, below:

FrSky FPort Serial Receiver Provider

Telemetry

TELEMETRY Telemetry output

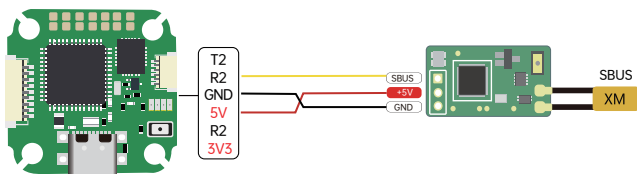


Receiver

Serial (via UART) Receiver Mode

- The UART for the receiver must be set to 'Serial Rx' (in the Ports tab)
- Select the correct data format from the drop-down, below:

SBUS Serial Receiver Provider

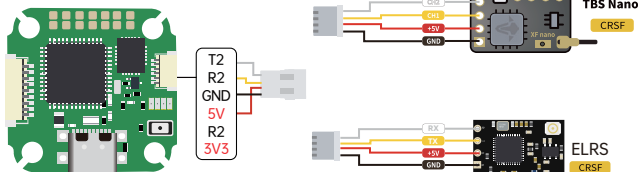

Receiver

Serial (via UART) Receiver Mode

- The UART for the receiver must be set to 'Serial Rx' (in the Ports tab)
- Select the correct data format from the drop-down, below:


CRSF Serial Receiver Provider

Telemetry


☒ **TELEMETRY** Telemetry output

2.Remote Controller Binding Instruction: Receiver Binding Methods and Steps (ELRS+TBS)


ELRS Binding Method1: Traditional Binding Procedure (Example: iFlight ExpressLRS 900TX)




Plug and unplug the USB port for three times: Power on and off the aircraft for 3 times, plug and unplug the USB port for 3 times to supply power to the receiver when the aircraft is power off, the blue LED will start to double flash continuously. Bind mode is active.



1. After powerlong press the Model setup to enter MODELSEL




2. Press Next Page to enter the SETUP page.




3. Scroll down to External RF and select CRSF.



4. Press System Settings to TOOLS page and select the ExpressLRS. Press to enter.



5. Scroll down to **[Bind]**, press Enter to enter the binding mode. Bind mode active.




6. After binding, the blue LED on the receiver will turn to solid blue. Binding is successful.

[Note]

1. Be quick with this process and set the receiver in binding mode first.
2. After the binding process is completed, it's recommended to re-power receiver.
3. The distance of receiver and remote controller should be more than 1m during the process.
4. The receiver firmware version should be consistent with the RF module firmware version. If you can't bind your hardware, please try to update to the latest firmware.
5. If you can't bind your aircraft, please try to reboot and several times if necessary.

2. Using Custom Binding Phrase





When flashing the latest ELRS firmware for Receiver and Transmitter, just set a unique custom binding phrase to automatically bind all your hardware. Do not set a too simple binding phrase, otherwise other pilot's devices with the same binding phrase might link up as well.

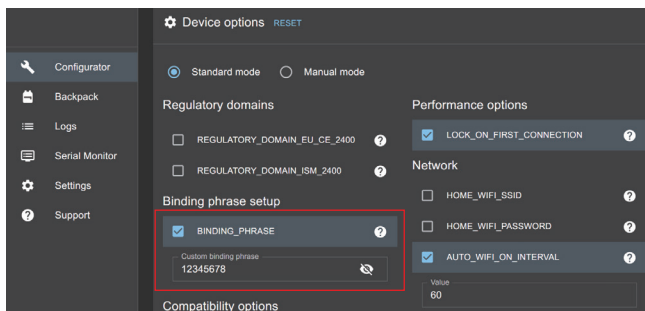


For more specific information please refer to the ELRS quick start tutorial on the official website.

TBS Crossfire Binding Method: Using Button Binding

Power on the aircraft and after the aircraft completes self-check, use tweezers to short press the TBS Crossfire receiver BOOT button. If the green light flashes, it means binding mode activate. Enter the TBS Crossfire transmitter or TX module settings page, scroll down to [BIND], press the button to enter. After successful binding, the TBS Crossfire receiver indicator light will turn to solid green.



III. Aircraft Setting

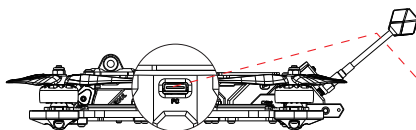

Download Betaflight Configurator*1 and connect to Flight Controller

a. Receiver Port/Protocol

ELRS/TBS Receiver: CRSF

Identifier	Configuration/MSP	Serial Rx	Telemetry Output
USB VCP	☒ 115200	☐	Disabled AUTO
UART1	☒ 115200	☐	Disabled AUTO
UART2	☐ 115200	☒	Disabled AUTO
UART3	☒ 115200	☐	Disabled AUTO
UART4	☐ 115200	☐	Disabled AUTO
UART5	☐ 115200	☐	Disabled AUTO
UART6	☐ 115200	☐	Disabled AUTO

Receiver

Serial (via UART)
Receiver Mode

The UART for the receiver must be set to 'Serial Rx' (in the Ports tab)

Select the correct data format from the drop-down, below:

CRSF
Serial Receiver Provider

Telemetry

☒
TELEMETRY
Telemetry output

b. Channel Map Setting

Receiver Channel Map: "AETR1234" Mode 1 Throttle, "TAER1234" Mode 2 Throttle

Setup
Ports
Configuration
Power & Battery
Presets
PID Tuning
Receiver
Modes
Motors
OSD
Video Transmitter
Blackbox
CLI

Preview

Roll [A] 12:00
Pitch [E] 12:00
Yaw [R] 12:00
Throttle [T] 885
AUX 1 12:00
AUX 2 12:00
AUX 3 12:00
AUX 4 12:00
AUX 5 12:00
AUX 6 12:00
AUX 7 12:00
AUX 8 12:00
AUX 9 12:00
AUX 10 12:00
AUX 11 12:00
AUX 12 12:00

Receiver

Serial (via UART)
Receiver Mode

The UART for the receiver must be set to 'Serial Rx' (in the Ports tab)

Select the correct data format from the drop-down, below:

CRSF
Serial Receiver Provider

Telemetry

☒
TELEMETRY
Telemetry output

RSSI (Signal Strength)

☐
RSSI ADC
Analog RSSI Input

Channel Map

AETR1234
RSSI Channel Disabled

Slick Low Threshold

1050
1500
Slick High Threshold 1900

RC Deadband

0
0
3D Throttle Deadband 50

RC Smoothing

On
Smoothing Mode

Refresh Save

c. Mode Switch (Default Angle)

The default mode is Angle, and customers can also switch to other modes.

ARM: ARM/DISARM channel switch for arm and disarm the aircraft, default factory setting is AUX1, low range for disarm, high range for arm, The icon is lit to indicate arm, the icon is grey to indicate disarm.




ANGLE: Angle channel switch, used to turn on the Angle flight mode, the default factory setting is AUX 2, this mode remains on throughout the flight. The icon is illuminated to indicate Angle mode is on, the icon is grey to indicate Angle mode.



IV. Propellers Installation

Identify CW & CCW propellers and install them correctly on the aircraft.



Caution ⚠

- ◆ Before removing or installing the propellers, please make sure the aircraft is powered off.
- ◆ Handle propellers carefully to avoid accidental cuts.
- ◆ Propellers are consumables; inspect and replace them if worn, damaged, or deformed.
- ◆ Ensure propellers are installed correctly and securely before each flight.
- ◆ Avoid close contact with rotating propellers and motors.
- ◆ This product is not intended for children.

V. Pre-Flight Check

Warning: Before tuning, maintenance, or troubleshooting, always ensure that the propellers are removed or not installed. Only install the propellers after successful binding and proper setup verification. Improper operation may result in personal injury, for which the user assumes full responsibility. Please operate with extreme caution and prioritize safety at all times.

Please check the following before each flight.


1. Make sure the antenna is installed correctly before powering on the aircraft.
2. Make sure the aircraft batteries are fully charged and there is no obvious damage, deformation or leakage in the battery.
3. Make sure the battery model is compatible with the aircraft and the voltage specification is correct (e.g. for 6S battery, it should be about 22.2V).
4. Make sure the aircraft battery is properly connected and secure, there is no looseness, dirt or damage.
5. Make sure the remote controller is powered on and bind to the aircraft, and verify the receiver indicator light flashes normally or indicates a connection.
6. Make sure the motor rotates in the right direction, take off the propellers and connect the aircraft to Betaflight Configurator, then push the throttle to confirm the rotation on the motor page.
7. Make sure propellers are in good condition and mounted onto the motors correctly and securely.
8. Make sure the takeoff area is open and free of obstacles. Keep a safe distance from people and valuable objects to prevent potential damage in case of loss of control.
9. If it is the first flight or after a major upgrade, it is recommended to conduct a ground test first to make sure all functions are normal before flying in the air. These preventive inspections can effectively reduce flight accidents caused by negligence and ensure the safe operation of FPV drones.

VI. Flight Operation

1. Basic Remote Controller Operation

The aircraft is controlled via the remote controller sticks. There are two main stick configurations: Mode 1 and Mode 2

2. The following diagram uses Mode 2 as an example. See the remote controller manual for more information.

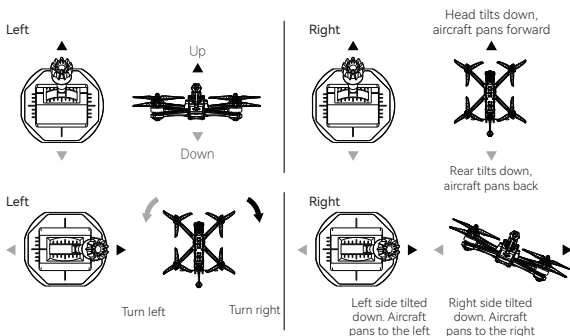

2. Flight Procedures

Note: Before operating the aircraft, please check local laws and regulations. In some areas, the use of aircraft may be restricted or prohibited. Users are solely responsible for complying with all applicable laws and regulations during flight operations, and any violations will be at your own risk.

2.1 Takeoff Procedure:

Start by pushing the throttle to the lowest position, then gradually increase it to lift the aircraft approximately 10-20cm off the ground. Once the aircraft's attitude is stable, throttle down and disarm the remote controller. Put on FPV goggles or face the monitor (such as a handheld monitor), arm the remote controller and slowly increase the throttle to smoothly ascend.

2.2 Landing Procedure:

1. Decrease altitude, before landing, gradually lower the aircraft to an appropriate altitude, maintaining a stable flight speed and attitude.
2. Approach landing spot, control the aircraft to slowly approach the pre-selected landing area, preferably using a gliding approach to better control the distance.
3. Reduce throttle, slowly decrease throttle output to allow the aircraft to land slowly.
4. Disarm the aircraft when it touches the ground or is 5-10cm away from the ground, be careful to avoid hard landings that could cause damage.
5. After landing, immediately unplug the battery to power off the device to avoid injury.

Precautions:

- Monitor battery level: You can check the remaining battery power by checking the OSD information in the FPV goggles or the monitor during flight. You need to judge the remaining flight time and leave enough redundancy for safe landing. When the voltage of a single battery cell approaches 3.7, you need to pay attention to return and land. Over-discharge will cause irreversible damage to the battery.
- Observe surroundings: Before landing, double-check the surrounding environment for safety, ensuring no people or animals are in the landing area.
- Disconnect battery: After landing, it is important to first power off the aircraft to avoid accidentally triggering the remote controller switch to arm it again, preventing potential accidents and injury.

VII. GPS Rescue Mode Instruction (Not Standard) *2

When setting up GPS, please connect the battery to ensure that the GPS can be properly configured in Betaflight *1.

If this aircraft is already equipped with GPS, please refer to the GPS Rescue Mode Precautions for setup instructions.

Rescue Trigger Operation:

- ① If the aircraft has automatically triggered GPS rescue, after it returns, you only need to move either joystick (left or right) to take manual control, do not toggle the GPS rescue switch.
 - ② When the aircraft returns due to manually triggering the GPS rescue switch, and it has returned to within controllable range, you need to toggle the GPS rescue switch again to regain control.
- If the GPS rescue switch is manually toggle after the remote controller successfully takes over, it will cause GPS rescue mode to turn on again. If rescue conditions are not met at that time, this may cause the aircraft to lock and fall.

Note: Before enabling GPS rescue mode and operating the aircraft, please carefully read all precautions in GPS Rescue Mode Precautions.

VIII. Troubleshooting Guide

Issue	Possible Reason	Solution
The aircraft does not respond to the remote control stick input.	Receiver protocol settings do not match the actual configuration.	Check if the receiver protocol settings are consistent with the serial port to which the receiver is connected.
The aircraft does not respond to the remote control stick input.	Mode settings conflict causing failure to arm.	Check if there are any conflicts or duplicates in the Betaflight Configurator mode settings.
	Receiver channel presets do not match the transmitter channel presets.	Verify and configure receiver channel map setting to match the transmitter channel map setting.
	Aircraft is at a tilted angle.	Check the maximum arming angle setting on the Betaflight Configurator page.
	Throttle channel is too high.	Move the throttle stick to the lowest position or verify if the channel number is correct.
	GPS rescue mode configured but GPS acquisition unsuccessful or insufficient satellites.	Wait for GPS fix or disable the GPS rescue mode.

GPS Rescue Mode not Triggering	Flight distance has not exceeded 100 meters.	Fly in a straight line for at least 100 meters past your descent distance, make sure the home arrow is pointing at your direction to confirm GPS functionality.
Aircraft Rolls Over Immediately on Takeoff or Cannot Take Off	Propellers installed incorrectly.	Ensure that the propeller direction matches the motor direction.
Unusual Noise from Motors After Takeoff	Propellers are loose.	Tighten the propellers.
	Propeller shaft is damaged.	Replace the propeller.

IX. Warranty Policy and Service Information

Please visit the iFlight official website at <https://shop.iflight.com/help-center-aftersales.html> to learn the latest aftersales service and warranty information.

IFLIGHT INNOVATION TECHNOLOGY LIMITED

TEL: +86752-3866-695

Email: support@iflight.com

Website: www.iflight.com

ADD: 6th Floor, Building B2, Galaxy IMC, Beixin Road, Zhongkai Avenue, Huizhou 516006, Guangdong, CHINA



Follow us for more information and support

Note:

*1: Betaflight configuration is a flight controller software (firmware) used to configure your aircraft.

Please download at this link: <https://betaflight.com/download>

*2: GPS is an optional product and needs to be purchased separately.