


XING 0803 17000KV	
KV	17000KV
Weight (included wire)	2.1g
Dimension	Φ10.8*14.4mm
Interphase resistance	58mΩ
Input Volts	4.0V
Peak Current	4.11A
Max Watt	16.4W
Mounting Holes	6.6*6.6-φ1.4mm
Rotor specifications	Segmented bell
Shaft Diameter	1.0mm
Shaft Protruding Length	5.5mm
Lead	30mm/30AWG/SH1.25
Magnet	N52H Curved
Configuration	9N12P
Bearing type	NSK
Bearing specs	φ4*φ2*15
Winding	Single strand copper winding
Package included	M1.4*3mm screw (4PCS)

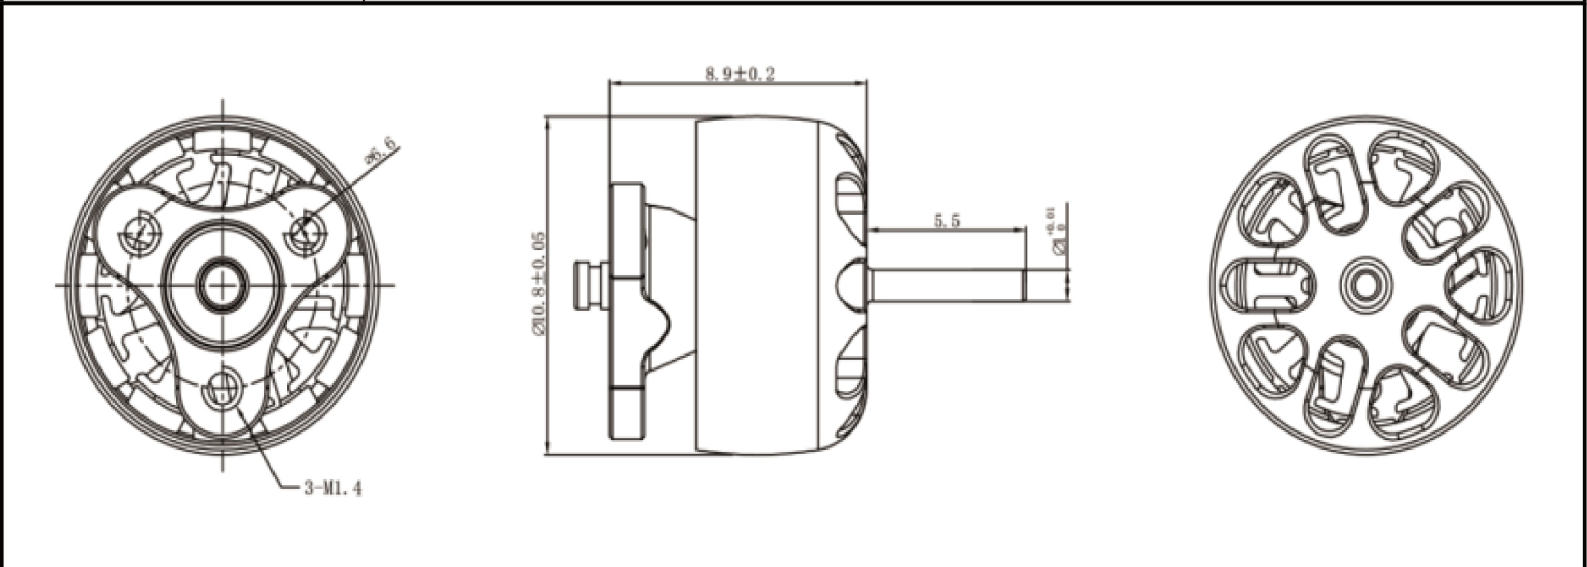

Datasheet								
Type	Prop (inch)	Throttle (%)	Voltages (V)	Load Current (A)	Pull (g)	Power (W)	Efficiency (g/W)	Temperature
XING 0803 17000KV	GF 40mm	60%	4.0	1.08	10.9	4.3	2.523	51℃
		70%	4.0	1.48	14.6	5.9	2.466	
		80%	4.0	2.43	22.5	9.7	2.315	
		90%	4.0	3.01	26.8	12.0	2.226	
		100%	4.0	4.11	35.9	16.4	2.184	