


XING 2005 1900KV	
KV	1900KV
Weight (included wire)	21g
Dimension	Φ26.8*19mm
Interphase resistance	125.3mΩ
Input Volts	24V
Peak Current	19.37A
Max Watt	464.9W
Mounting Holes	12*12-φ2mm
Rotor specifications	Segmented bell
Shaft Diameter	1.5mm
Shaft Protruding Length	4mm
Lead	160mm/24AWG
Magnet	N52H Curved
Configuration	12N14P
Bearing type	NSK
Bearing specs	φ8*φ3*4
Winding	Single strand copper winding
Package included	M2*7mm screw (4PCS) / M2*5mm screw (4PCS)

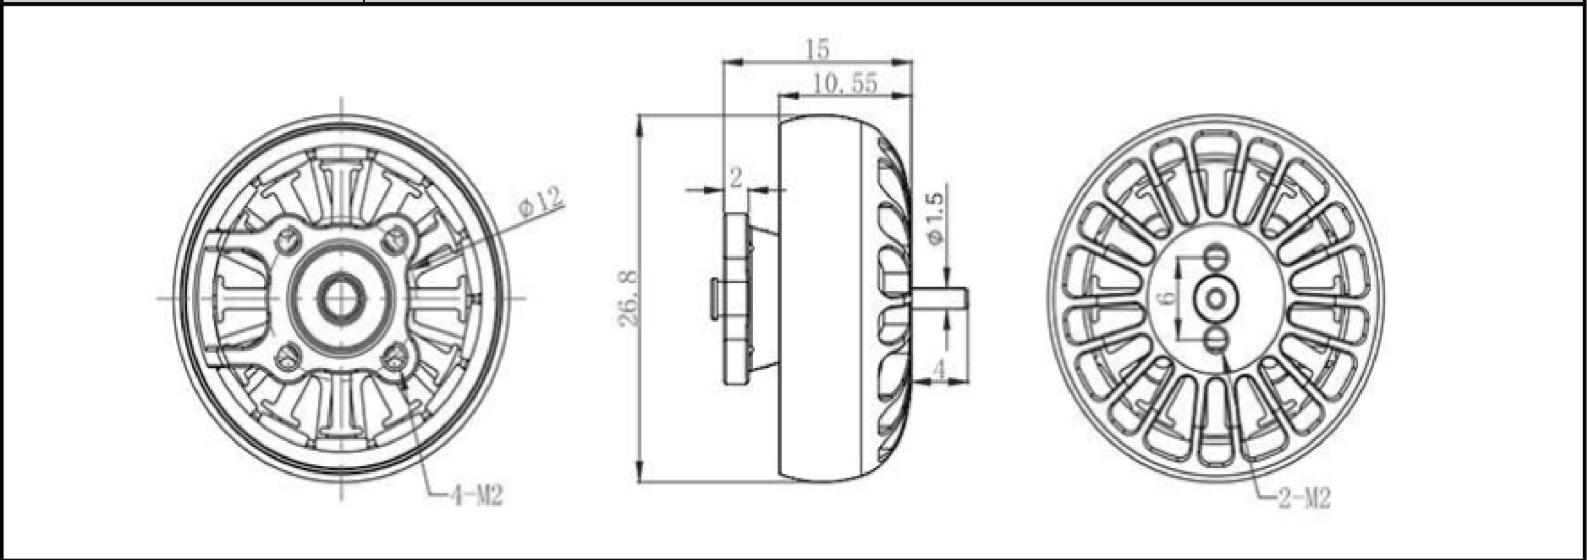

Datasheet								
Type	Prop (inch)	Throttle (%)	Voltages (V)	Load Current (A)	Pull (g)	Power (W)	Efficiency (g/W)	Temperature
XING 2005 1900KV	5*3*3	50%	24	4.72	367	113.3	3.239	75℃
		60%	24	6.85	515.0	164.4	3.133	
		70%	24	10.27	667.0	246.5	2.706	
		80%	24	13.92	798.0	334.1	2.389	
		90%	24	17.25	912.0	414.0	2.203	
		100%	24	19.37	1030.0	464.9	2.216	