


XING 2205 2300KV	
KV	2300kv
Weight (included wire)	23.7g
Dimension	Ø28.6*29.5mm
Interphase resistance	72.41mΩ
Input Volts	25.2V
Peak Current	25.98A
Max Watt	655W
Mounting Holes	12*12-φ2mm
Rotor specifications	Unibell
Shaft Diameter	5mm
Shaft Protruding Length	13.5mm
Lead	160mm/22AWG
Magnet	N52H Curved
Configuration	12N14P
Bearing type	NSK
Bearing specs	8*3*4mm
Winding	Single Strand Copper Winding
Package included	M2*7mm screw (4PCS) /M5 Flange Nut (1PCS)

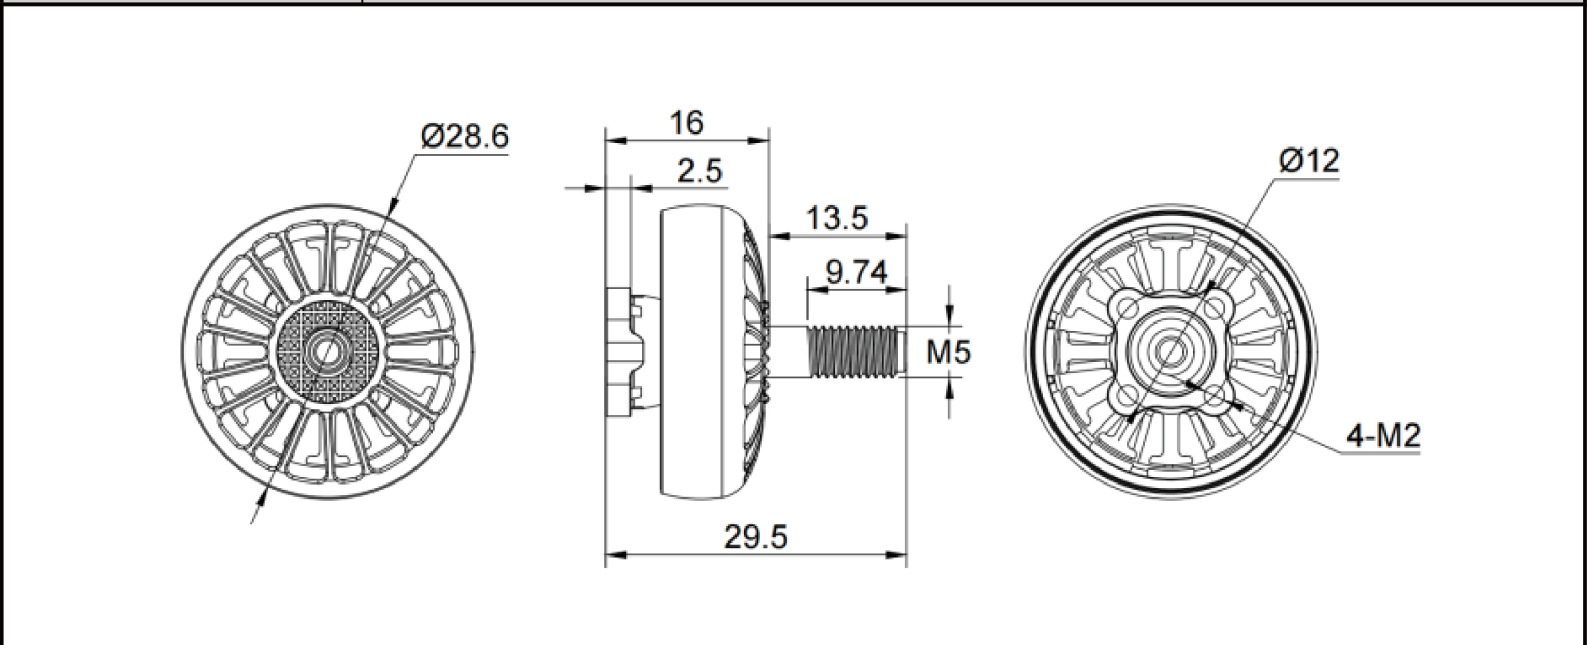

Datasheet								
Type	Prop (inch)	Throttle (%)	Voltages (V)	Load Curren (A)	Pull (g)	Power (W)	Efficiency (g/W)	Temperatur e
2205 2300KV	Nazgul 3535	50%	25.2	6.15	400	155	2.58	100.2°C
		60%	25.2	9.28	538	234	2.30	
		70%	25.2	13.36	699	337	2.08	
		80%	25.2	18.11	836	456	1.83	
		90%	25.2	22.82	995	575	1.73	
		100%	25.2	25.98	1121	655	1.71	