


XING 2205 3200KV	
KV	3200KV
Weight （included wire）	26.7g
Dimension	φ28.6*29.55mm
Interphase resistance	50.63mΩ
Input Volts	16.8V
Peak Current	33.06A
Max Watt	548.1W
Mounting Holes	12*12-φ2mm
Rotor specifications	Unibell
Shaft Diameter	5mm
Shaft Protruding Length	13.5mm
Lead	160mm/22AWG
Magnet	N52H Curved
Configuration	12N14P
Bearing type	NSK
Bearing specs	φ8*φ3*4
Winding	Single strand copper winding
Package included	M2*7mm screw (4PCS) / M5 Flange Nut (1PC)

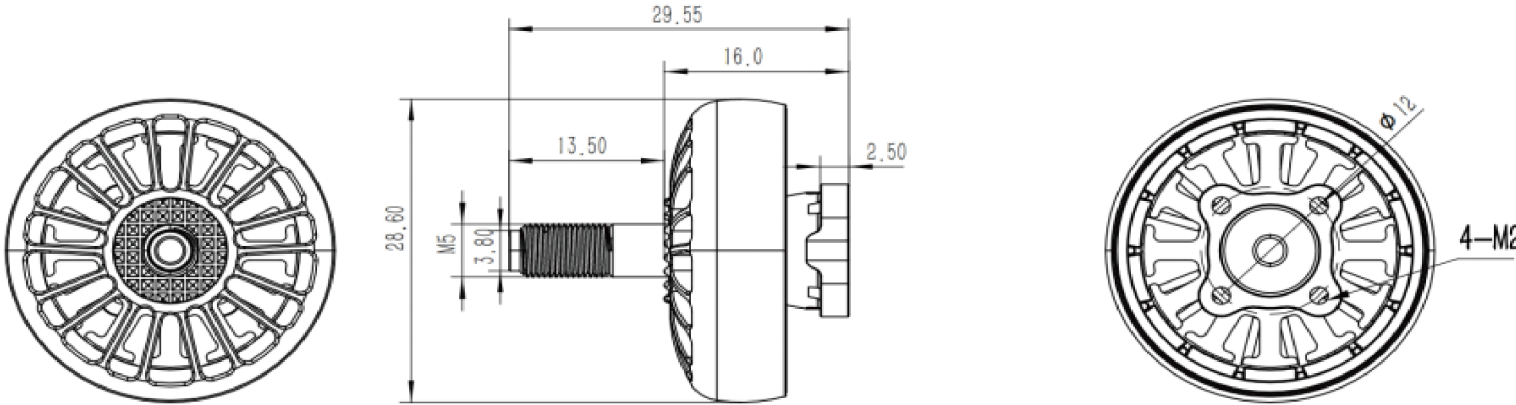

Datasheet								
Type	Prop (inch)	Throttle (%)	Voltages (V)	Load Curren (A)	Pull (g)	Power (W)	Efficiency (g/W)	Temperature
XING 2205	Nazgul 3535	50%	16.8	7.76	267	130.4	2.047	65℃
		60%	16.79	11.74	354	197.1	1.795	
		70%	16.69	15.92	424	265.7	1.597	
		80%	16.72	20.58	528	344.1	1.533	
		90%	16.62	27.59	625	458.5	1.364	
		100%	16.58	33.06	710	548.1	1.295	
	Nazgul Cine 3040	50%	16.8	6.12	240	102.8	2.336	68℃
		60%	16.72	9.1	307	152.2	2.02	
		70%	16.71	12.75	408	213.1	1.915	
		80%	16.65	17.26	503	287.4	1.751	
		90%	16.63	22.52	600	374.5	1.601	
		100%	16.57	29.64	703	491.1	1.431	