


XING 2208 1800KV	
KV	1800KV
Weight （included wire）	37g
Dimension	φ28.55*34.2mm
Interphase resistance	53.7mΩ
Input Volts	24V
Peak Current	46.57A
Max Watt	1118W
Mounting Holes	16*16-φ3mm
Rotor specifications	Unibell
Shaft Diameter	5mm
Shaft Protruding Length	13.5mm
Lead	160mm/20AWG
Magnet	N52H Curved
Configuration	12N14P
Bearing type	NSK
Bearing specs	φ9xφ4x4
Winding	Single Strand Copper Winding
Package included	M3*8mm screw （4PCS） / M5 Flange Nut （1PC）

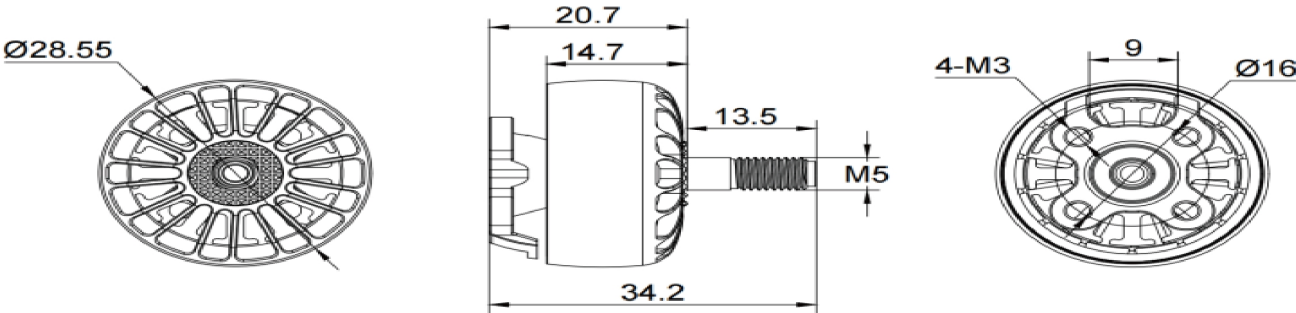

Datasheet								
Type	Prop (inch)	Throttle (%)	Voltages (V)	Load Current (A)	Pull (g)	Power (W)	Efficiency (g/W)	Temperature
XING 2208	6045	50%	24	9.6	810	230	3.516	67℃
		60%	24	14.73	1078	354	3.049	
		70%	24	21.42	1386	514	2.696	
		80%	24	28.02	1569	672	2.333	
		90%	24	36.28	1825	871	2.096	
		100%	24	46.57	2149	1118	1.923	
	5146	50%	24	8.87	672	213	3.157	60℃
		60%	24	13.87	910	333	2.734	
		70%	24	20.02	1172	480	2.439	
		80%	24	26.55	1372	637	2.153	
		90%	24	35.15	1614	844	1.913	
		100%	24	40.63	1749	975	1.794	
	5055	50%	24	8.4	679	202	3.368	60℃
		60%	24	13.07	911	314	2.904	
		70%	24	18.95	1165	455	2.562	
		80%	24	25.55	1414	613	2.306	
		90%	24	32.88	1671	789	2.118	
		100%	24	41.57	1903	998	1.907	
	5050	50%	24	8.6	667	206	3.232	61℃
		60%	24	13.4	908	322	2.823	
		70%	24	19.15	1142	460	2.485	
		80%	24	26.02	1362	624	2.181	
		90%	24	33.88	1606	813	1.975	
		100%	24	42.83	1828	1028	1.778	
	5045	50%	24	7	562	168	3.345	56℃
		60%	24	10.67	763	256	2.980	
		70%	24	14.95	981	359	2.734	
		80%	24	20.48	1200	492	2.441	
		90%	24	26.75	1446	642	2.252	
		100%	24	34.42	1683	826	2.037	
	5043	50%	24	7.8	560	187	2.991	56℃
		60%	24	11.73	749	282	2.661	
		70%	24	16.68	967	400	2.416	
		80%	24	22.55	1171	541	2.164	
		90%	24	29.15	1400	700	2.001	
		100%	24	37.02	1622	888	1.826	