


XING 2RAW 2812 1150KV	
KV	1150KV
Weight (included wire)	77g
Dimension	φ33.55*42.8mm
Interphase resistance	83.21mΩ
Input Volts	24V
Peak Current	61.15A
Max Watt	1423W
Mounting Holes	19*19-φ3mm
Rotor specifications	Segmented bell
Shaft Diameter	5mm
Shaft Protruding Length	15.15mm
Lead	260mm/18AWG
Magnet	N52H Curved
Configuration	12N14P
Bearing specs	φ11*φ5*5
Winding	Single strand copper winding
Package included	M3*6mm countersunk hex screw (4PCS) / M5 Flange Nut (1PCS)

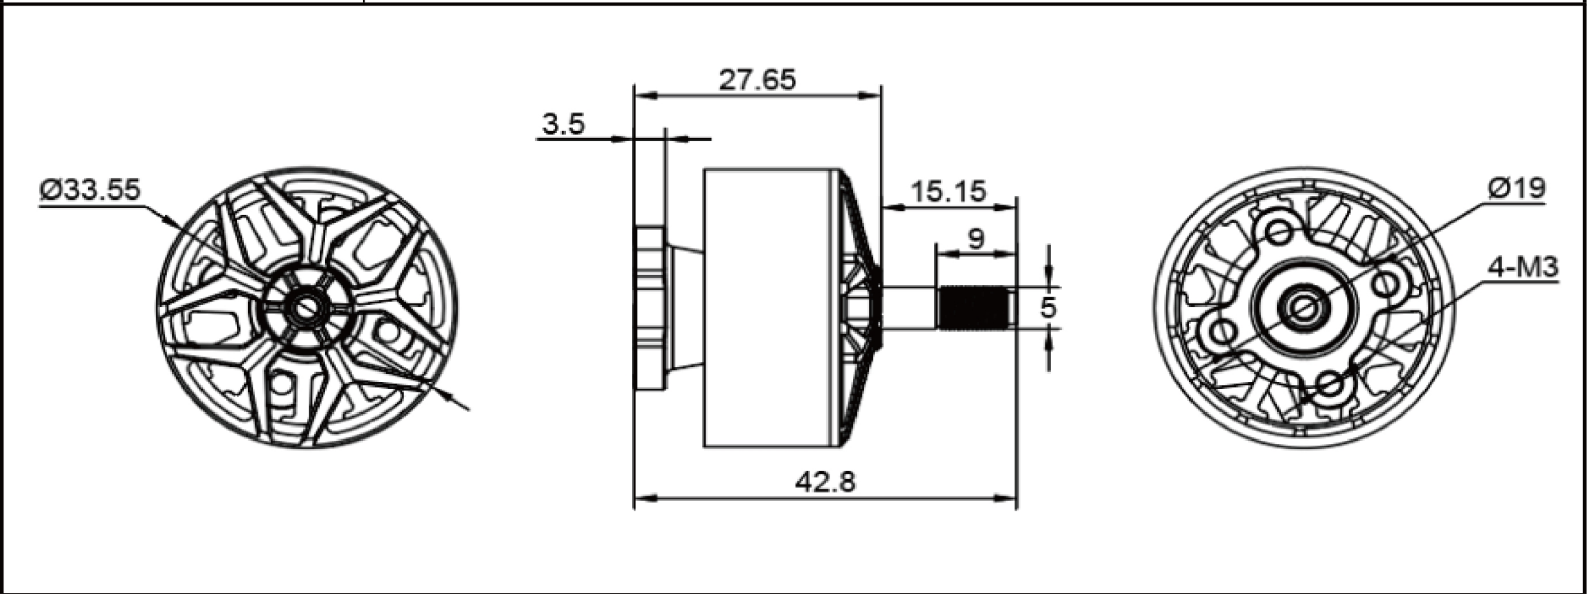

Datasheet								
Type	Prop (inch)	Throttle (%)	Voltages (V)	Load Current (A)	Pull (g)	Power (W)	Efficiency (g/W)	Temperature
XING 2RAW 2812 1150KV	GF 8*6*3	50%	23.91	13.5	1291	322.8	4	66℃
		60%	23.82	20.49	1704	488.1	3.49	
		70%	23.69	29.48	2143	698.4	3.07	
		80%	23.54	40.18	2576	945.8	2.72	
		90%	23.39	52.26	2961	1222.4	2.42	
		100%	23.27	61.15	3250	1423	2.28	
	HQ 8*4.5*3	50%	23.92	12.83	1237	306.9	4.03	61℃
		60%	23.81	19.85	1681	472.6	3.56	
		70%	23.68	28.7	2127	679.6	3.13	
		80%	23.55	39.5	2571	930.2	2.76	
		90%	23.39	51.57	2954	1206.2	2.45	
		100%	23.27	60.77	3232	1414.1	2.29	