


XING 2814 880KV	
KV	880kv
Weight （included wire）	88.3g
Dimension	Ø36*46mm
Interphase resistance	57.3mΩ
Input Volts	24V
Peak Current	50.9A
Max Watt	1221.6W
Mounting Holes	19*19-φ3mm
Rotor specifications	Unibell
Shaft Diameter	5mm
Shaft Protruding Length	15.5mm
Lead	300mm/18AWG
Magnet	N52H Curved
Configuration	12N14P
Bearing type	NSK
Bearing specs	φ11xφ5x5
Winding	Single Strand Copper Winding
Package included	M3*10mm screw （4PCS） /M5 Flange Nut (1PCS)

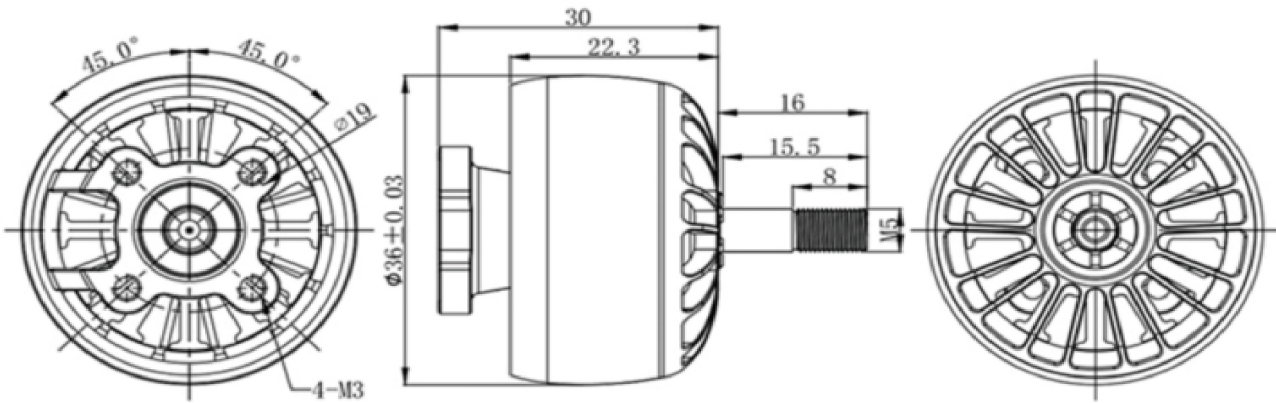

Datasheet								
Type	Prop (inch)	Throttle (%)	Voltages (V)	Load Curren (A)	Pull (g)	Power (W)	Efficiency (g/W)	Temperature
XING 2814 880KV	9x5x3	50%	24	5.5	811	132.0	6.144	70℃
		60%	24	8.6	1097	206.4	5.315	
		70%	24	12.9	1404	309.6	4.535	
		80%	24	18.4	1763	441.6	3.992	
		90%	24	25.1	2060	602.4	3.420	
		100%	24	33.9	2361	813.6	2.902	
	10x5x3	50%	24	8.2	1259	196.8	6.397	75℃
		60%	24	13.1	1689	314.4	5.372	
		70%	24	23.1	1908	554.4	3.442	
		80%	24	31.4	2163	753.6	2.870	
		90%	24	40.1	2360	962.4	2.452	
		100%	24	50.9	2761	1221.6	2.260	