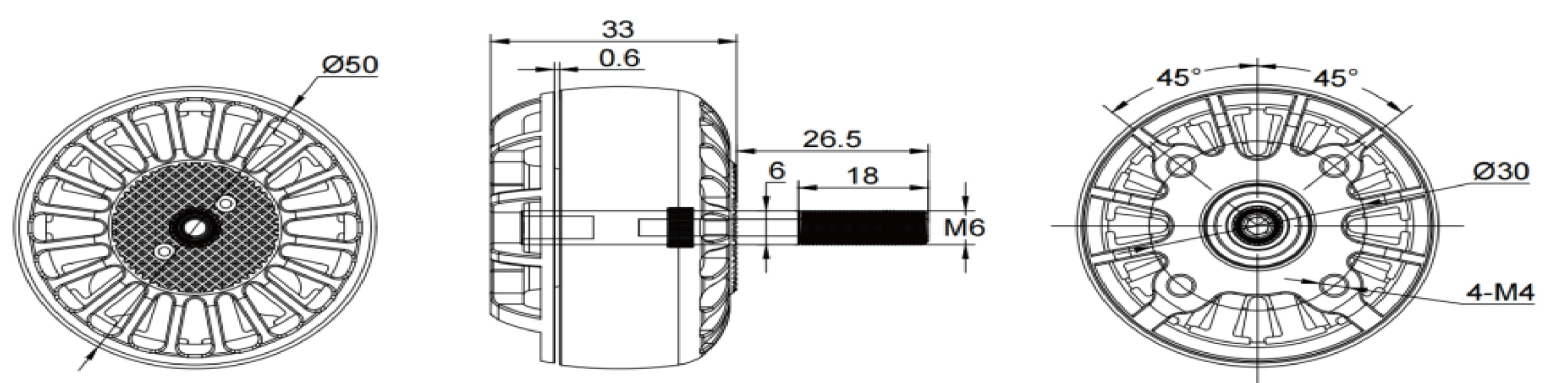


XING 4214 660KV								
KV值	600KV							
电机重量（含线）	255.2g							
外型尺寸	φ50*59.5mm							
相间内阻	35.6mΩ							
工作额定电压	24V							
最大电流	98A							
最大功率	2352W							
底座孔位	30*30-φ4mm							
外转子规格	分体							
出轴直径	6mm							
出轴长度	26.5mm							
出线长度/规格	805mm/14AWG							
磁铁类型	N48SH瓦形磁铁							
槽级	12N14P							
轴承类型	NSK							
轴承规格（外径*内径*高）	φ15*φ6*5							
绕线方式	单股							
配件包含	桨垫1（1Pcs）/桨垫2（1Pcs） 碳钢M3*8（4Pcs）/碳钢M4*8（4Pcs）/M6黑色法兰螺母（1Pcs）							
								
数据表								
型号	桨叶	油门值（%）	电压（V）	负载电流（A）	拉力（g）	功率（W）	效率（g/W）	温度（℃）
XING 4214 600KV	16×6	50%	24	22.2	3232	532.8	6.066	90℃
		60%	24	33.8	4233	811.2	5.218	
		70%	24	48.1	5297	1154.4	4.589	
		80%	24	64.2	6246	1540.8	4.054	
		90%	24	83.1	7116	1994.4	3.568	
		100%	24	98	7900	2352.0	3.359	
	15×6	50%	24	18.7	2745	448.8	6.116	85℃
		60%	24	29.2	3738	700.8	5.334	
		70%	24	40.6	4636	974.4	4.758	
		80%	24	55.7	5651	1336.8	4.227	
		90%	24	72.2	6575	1732.8	3.794	
		100%	24	83.5	7120	2004.0	3.553	
	14×6	50%	24	14.7	2191	352.8	6.210	70℃
		60%	24	22.4	3008	537.6	5.595	
		70%	24	32.5	3880	780.0	4.974	
		80%	24	44	4754	1056.0	4.502	
		90%	24	58.8	5692	1411.2	4.033	
		100%	24	67.1	6179	1610.4	3.837	
	15×6	50%	12	6.6	692	79.2	8.737	50℃
		60%	12	9.8	1001	117.6	8.512	
		70%	12	14.6	1384	175.2	7.900	
		80%	12	20.6	1785	247.2	7.221	
		90%	12	26.7	2162	320.4	6.748	
		100%	12	30.3	2383	363.6	6.554	