


XING 5215 330KV	
KV	330KV
Weight (included wire)	342.8g
Dimension	φ60.8*45mm
Interphase resistance	52.3mΩ
Input Volts	32V
Peak Current	76.3A
Max Watt	2441.6W
Mounting Holes	30*30-φ4mm
Rotor specifications	Segmented bell
Shaft Diameter	4mm
Shaft Protruding Length	5mm
Lead	805mm/14AWG
Magnet	N48SH Curved
Configuration	12N14P
Bearing type	NSK
Bearing specs	φ15*φ6*5
Winding	Multi-strand copper winding
Package included	Propeller Adapter (1Pcs) /Propeller Pad 1 (1Pcs) /Propeller Pad 2 (1Pcs) Carbon Steel M3*12 (4Pcs) /Carbon Steel M4*12 (4Pcs) M6 Black Flange Nuts (1Pcs)

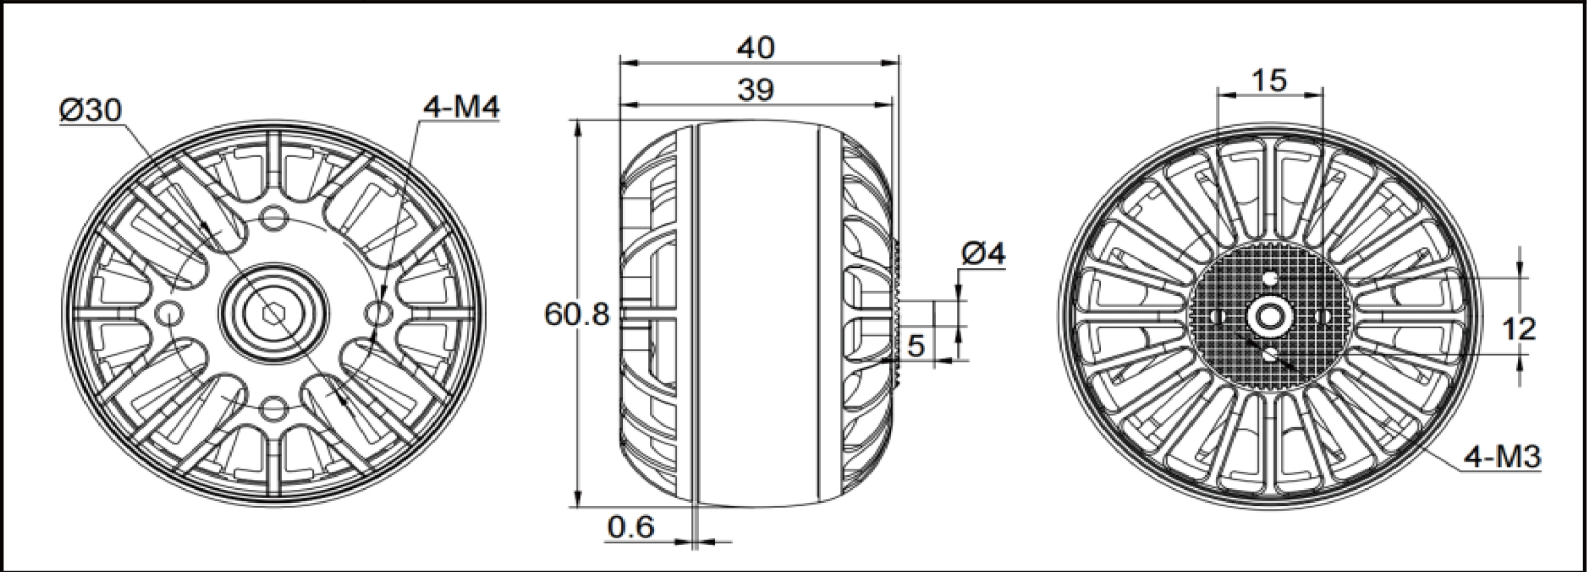

Datasheet								
Type	Prop (inch)	Throttle (%)	Voltages (V)	Load Curren (A)	Pull (g)	Power (W)	Efficiency (g/W)	Temperature
XING 5215 330KV	22×6 2-blades	50%	32	11.1	3647	355.2	10.267	85℃
		60%	32	23.1	4919	739.2	6.654	
		70%	32	34.2	5639	1094.4	5.153	
		80%	32	48.3	6843	1545.6	4.427	
		90%	32	60.3	7663	1929.6	3.971	
		100%	32	76.3	8461	2441.6	3.465	
	22×6 2-blades	50%	24	13.5	2739	324.0	8.454	85℃
		60%	24	20.8	3676	499.2	7.364	
		70%	24	30	4670	720.0	6.486	
		80%	24	41	5558	984.0	5.648	
		90%	24	53	6391	1272.0	5.024	
		100%	24	60	6851	1440.0	4.758	