


XING2 1806 1600KV	
KV	1600kv
Weight (included wire)	20.2g
Dimension	Ø25.2*20.3mm
Interphase resistance	0.32Ω
Input Volts	24V
Peak Current	13.99A
Max Watt	336W
Mounting Holes	12*12-φ2mm
Rotor specifications	Unibell
Shaft Diameter	1.5mm
Shaft Protruding Length	4mm
Lead	160mm/20AWG
Magnet	N52H Curved
Configuration	12N14P
Bearing type	NSK
Bearing specs	φ9xφ4x4
Winding	Single Strand Copper Winding
Package included	M2*8mm screw (4PCS)

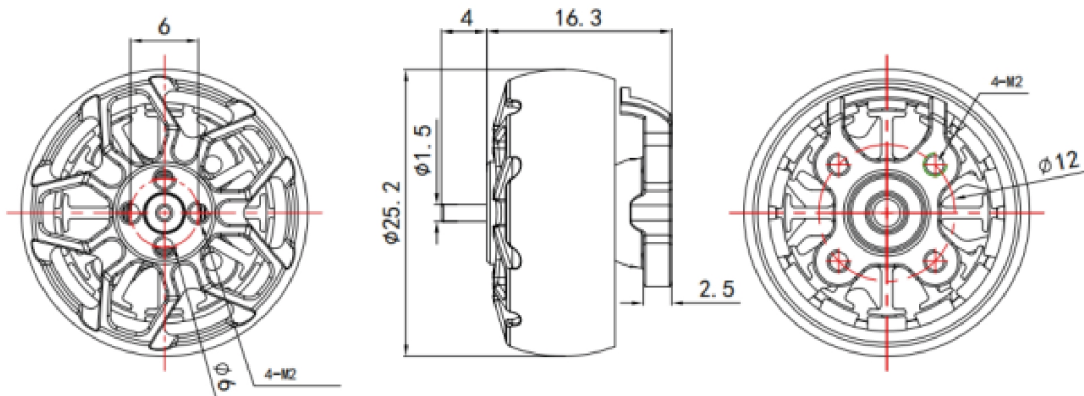

Datasheet								
Type	Prop (inch)	Throttle (%)	Voltages (V)	Load Curren (A)	Pull (g)	Power (W)	Efficiency (g/W)	Temperature
XING2 1806 1600KV	5030-3	50%	24	3.58	332	86	3.864	60°C
		60%	24	5.64	492	135	3.635	
		70%	24	8.21	608	197	3.086	
		80%	24	11.28	689	271	2.545	
		90%	24	12.36	723	297	2.437	
		100%	24	13.99	775	336	2.308	