


XING2 1806 2500KV	
KV	2500kv
Weight (included wire)	20.2g
Dimension	Ø25.2*20.3mm
Interphase resistance	0.1245Ω
Input Volts	24V
Peak Current	25.06A
Max Watt	601W
Mounting Holes	12*12-φ2mm
Rotor specifications	Unibell
Shaft Diameter	1.5mm
Shaft Protruding Length	4mm
Lead	160mm/20AWG
Magnet	N52H Curved
Configuration	12N14P
Bearing type	NSK
Bearing specs	φ9xφ4x4
Winding	Single Strand Copper Winding
Package included	M2*8mm screw (4PCS)

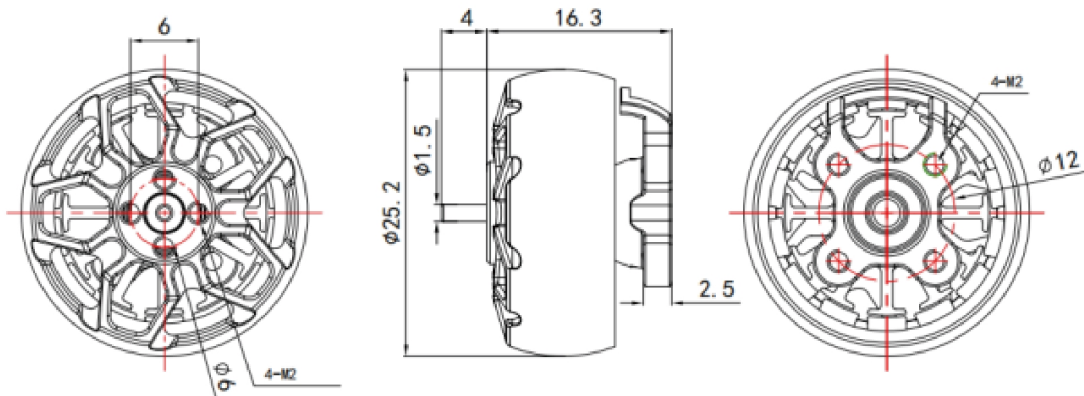

Datasheet								
Type	Prop (inch)	Throttle (%)	Voltages (V)	Load Curren (A)	Pull (g)	Power (W)	Efficiency (g/W)	Temperature
XING2 1806 2500KV	5030-3	50%	24	6.76	385	162	2.373	65°C
		60%	24	10.2	495	245	2.022	
		70%	24	13.58	606	326	1.859	
		80%	24	17.39	687	417	1.646	
		90%	24	21.03	747	505	1.480	
		100%	24	25.06	807	601	1.342	