


XING2 2207 1750KV	
KV	1750kv
Weight （included wire）	30.5g
Dimension	φ29*32.75mm
Interphase resistance	74.23mΩ
Input Volts	25.2V
Peak Current	36.03A
Max Watt	898W
Mounting Holes	16*16-φ3mm
Rotor specifications	Unibell
Shaft Diameter	5mm
Shaft Protruding Length	13.5mm
Lead	160mm/20AWG
Magnet	N52H Curved
Configuration	12N14P
Bearing type	NSK
Bearing specs	φ9xφ4x4
Winding	Single Strand Copper Winding
Package included	M3*10mm screw （4PCS） / M5 Flange Nut （1PC）

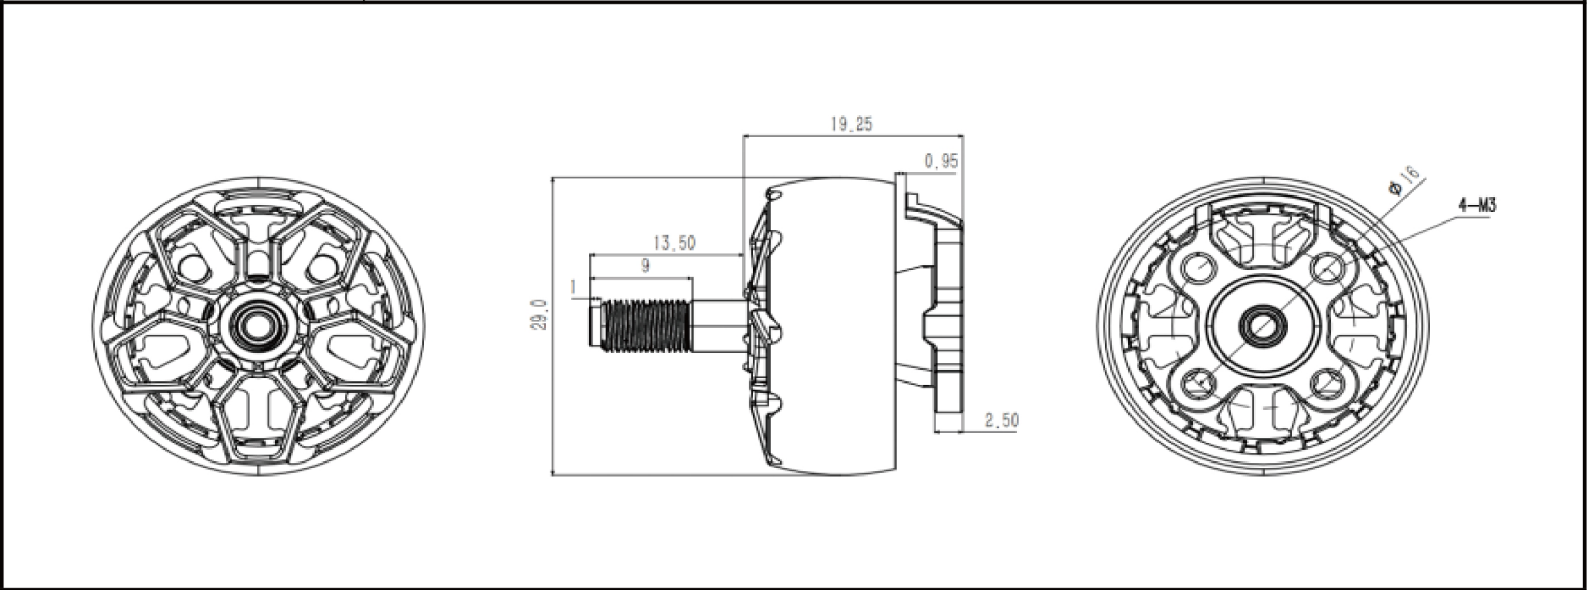

Datasheet								
Type	Prop (inch)	Throttle (%)	Voltages (V)	Load Curren (A)	Pull (g)	Power (W)	Efficiency (g/W)	Temperatur e
XING2 2207 1750KV	Nazgul F5	50%	25.18	7.02	564	177	3.191	60℃
		60%	25.12	9.97	785	250	3.134	
		70%	25.08	15.62	1047	392	2.673	
		80%	25.04	21.8	1248	546	2.286	
		90%	24.97	28.67	1452	716	2.028	
		100%	24.95	35.46	1678	885	1.897	
	GF51466	50%	25.18	7.46	588	188	3.130	63℃
		60%	25.12	10.5	803	264	3.044	
		70%	25.08	16.55	1085	415	2.613	
		80%	25.01	21.91	1268	548	2.314	
		90%	24.95	29.52	1507	737	2.046	
		100%	24.91	36.03	1703	898	1.897	