


XING2 2207 1855KV	
KV	1855KV
Weight （included wire）	31.6g
Dimension	φ29.08*32.6mm
Interphase resistance	50mΩ
Input Volts	24V
Peak Current	35.08A
Max Watt	841.90W
Mounting Holes	16*16-φ3mm
Rotor specifications	Unibell
Shaft Diameter	5mm
Shaft Protruding Length	13.5mm
Lead	160mm/20AWG
Magnet	N52H Curved
Configuration	12N14P
Bearing type	NSK
Bearing specs	φ9xφ4x4
Winding	Single Strand Copper Winding
Package included	M3*8mm screw （4PCS） / M5 Flange Nut （1PC）

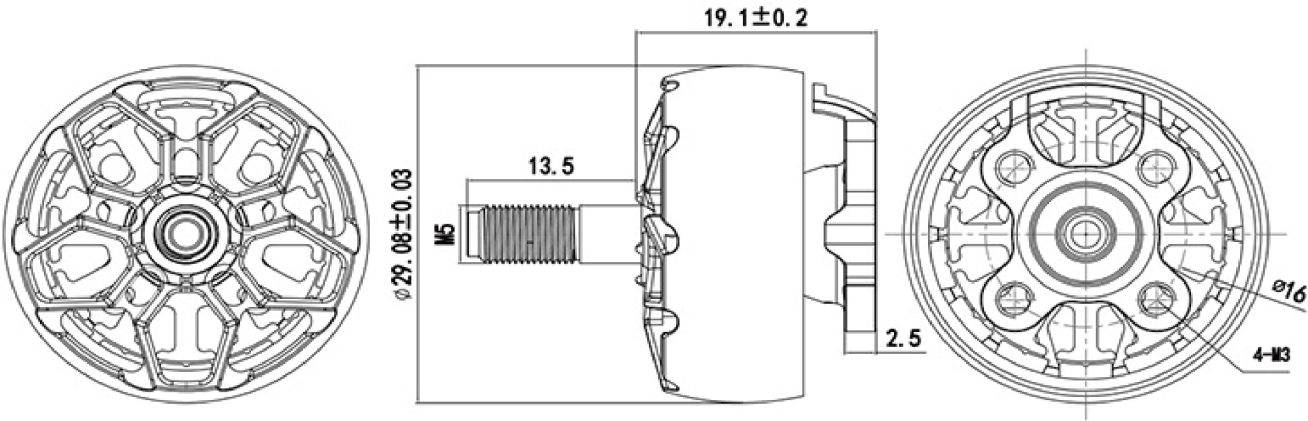

Datasheet								
Type	Prop (inch)	Throttle (%)	Voltages (V)	Load Curren (A)	Pull (g)	Power (W)	Efficiency (g/W)	Temperatur e
XING2 2207 1855KV	GF51466	50%	24.0	8.23	864	197.5	4.37	55℃
		60%	24.0	11.86	1021	284.6	3.59	
		70%	24.0	17.63	1208	423.1	2.85	
		80%	24.0	22.48	1339	539.5	2.48	
		90%	24.0	27.38	1509	657.1	2.30	
		100%	24.0	35.08	1685	841.9	2.00	
	5140	50%	24.0	7.53	713	180.7	3.95	56℃
		60%	24.0	10.56	909	253.4	3.59	
		70%	24.0	15.36	1081	368.6	2.93	
		80%	24.0	20.30	1231	487.2	2.53	
		90%	24.0	26.13	1334	627.1	2.13	
		100%	24.0	33.53	1436	804.7	1.78	