


XING2 2207 2750KV	
KV	2750KV
Weight （included wire）	30.5g
Dimension	φ29*32.75mm
Interphase resistance	74.23mΩ
Input Volts	16.8V
Peak Current	46.05A
Max Watt	706.9W
Mounting Holes	16*16-φ3mm
Rotor specifications	Unibell
Shaft Diameter	5mm
Shaft Protruding Length	13.5mm
Lead	160mm/20AWG
Magnet	N52H Curved
Configuration	12N14P
Bearing type	NSK
Bearing specs	φ9xφ4x4
Winding	Single Strand Copper Winding
Package included	M3*10mm screw （4PCS） / M5 Flange Nut （1PC）

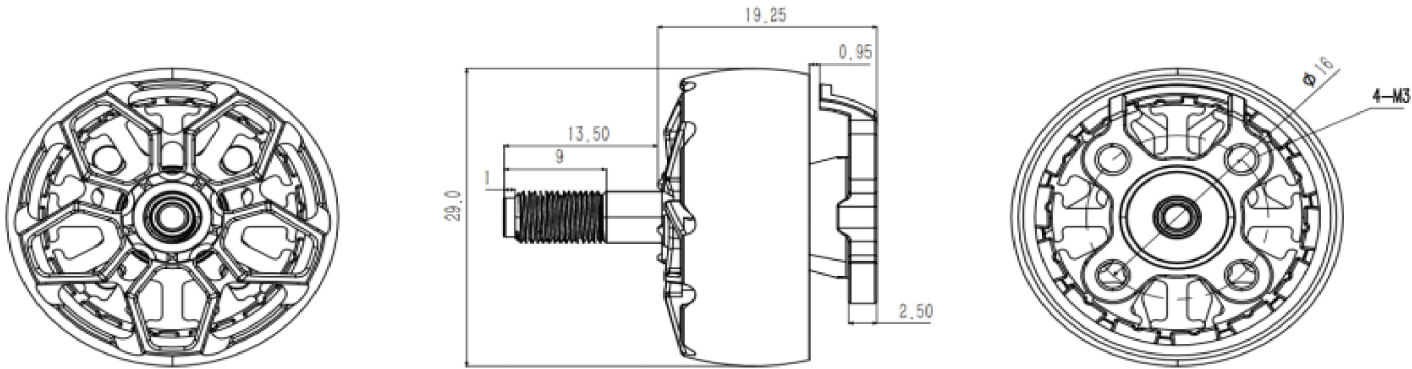

Datasheet								
Type	Prop (inch)	Throttle (%)	Voltages (V)	Load Curren (A)	Pull (g)	Power (W)	Efficiency (g/W)	Temperature
XING2 2207 2750KV	Nazgul F5	50%	15.85	10.59	558.4	167.9	3.33	68℃
		60%	15.77	16.28	759.8	256.7	2.96	
		70%	15.67	23.57	946.4	369.3	2.56	
		80%	15.54	31.96	1153.1	496.7	2.32	
		90%	15.46	37.6	1320.7	581.3	2.27	
		100%	15.33	45.95	1468.9	704.4	2.09	
	GF51466	50%	15.85	10.67	562.5	169.1	3.33	70℃
		60%	15.77	15.98	764.5	252.0	3.03	
		70%	15.68	22.87	972.3	358.6	2.71	
		80%	15.56	31.14	1170.7	484.5	2.42	
		90%	15.48	36.71	1343.2	568.3	2.36	
		100%	15.35	46.05	1498.5	706.9	2.12	