


XING2 2306 1755KV	
KV	1755KV
Weight （included wire）	32.5g
Dimension	φ30*32.2mm
Interphase resistance	76.4mΩ
Input Volts	24V
Peak Current	36.21A
Max Watt	869W
Mounting Holes	16*16-φ3mm
Rotor specifications	Unibell
Shaft Diameter	5mm
Shaft Protruding Length	13.5mm
Lead	160mm/20AWG
Magnet	N52H Curved
Configuration	12N14P
Bearing type	NSK
Bearing specs	φ9*φ4*4
Winding	Single Strand Copper Winding
Package included	M3*8mm screw （4PCS） / M5 Flange Nut （1PC）

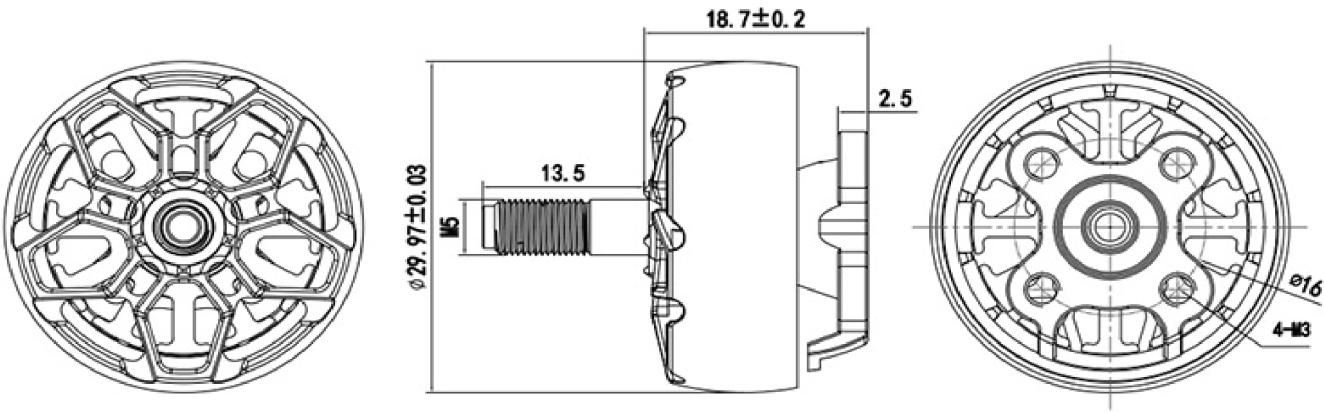

Datasheet								
Type	Prop (inch)	Throttle (%)	Voltages (V)	Load Curren (A)	Pull (g)	Power (W)	Efficiency (g/W)	Temperatur e
XING2 2306 1755KV	Nazgul 5140	50%	24.0	8.85	626	212.4	2.947	58℃
		60%	24.0	13.31	823	319.4	2.576	
		70%	24.0	19.46	957	467.0	2.049	
		80%	24.0	25.26	1128	606.2	1.861	
		90%	24.0	31.32	1265	751.7	1.683	
		100%	24.0	34.85	1415	836.4	1.692	
	GEMFAN 51466	50%	24.0	10.12	754	242.9	3.104	61℃
		60%	24.0	13.65	951	327.6	2.903	
		70%	24.0	18.75	1190	450.0	2.644	
		80%	24.0	23.14	1348	555.4	2.427	
		90%	24.0	30.05	1434	721.2	1.988	
		100%	24.0	36.21	1651	869.0	1.900	