


XING2 2506 1500KV	
KV	1500KV
Weight （included wire）	38.2g
Dimension	φ31.7*34.6mm
Interphase resistance	74.88mΩ
Input Volts	25.2V
Peak Current	33.26A
Max Watt	817.5W
Mounting Holes	16*16-φ3mm
Rotor specifications	Unibell
Shaft Diameter	5mm
Shaft Protruding Length	15mm
Lead	160mm/20AWG
Magnet	N52H Curved
Configuration	12N14P
Bearing type	NSK
Bearing specs	φ10*φ4*4
Winding	Single strand copper winding
Package included	M3*8mm screw (4PCS) / M5 Flange Nut (1PC)

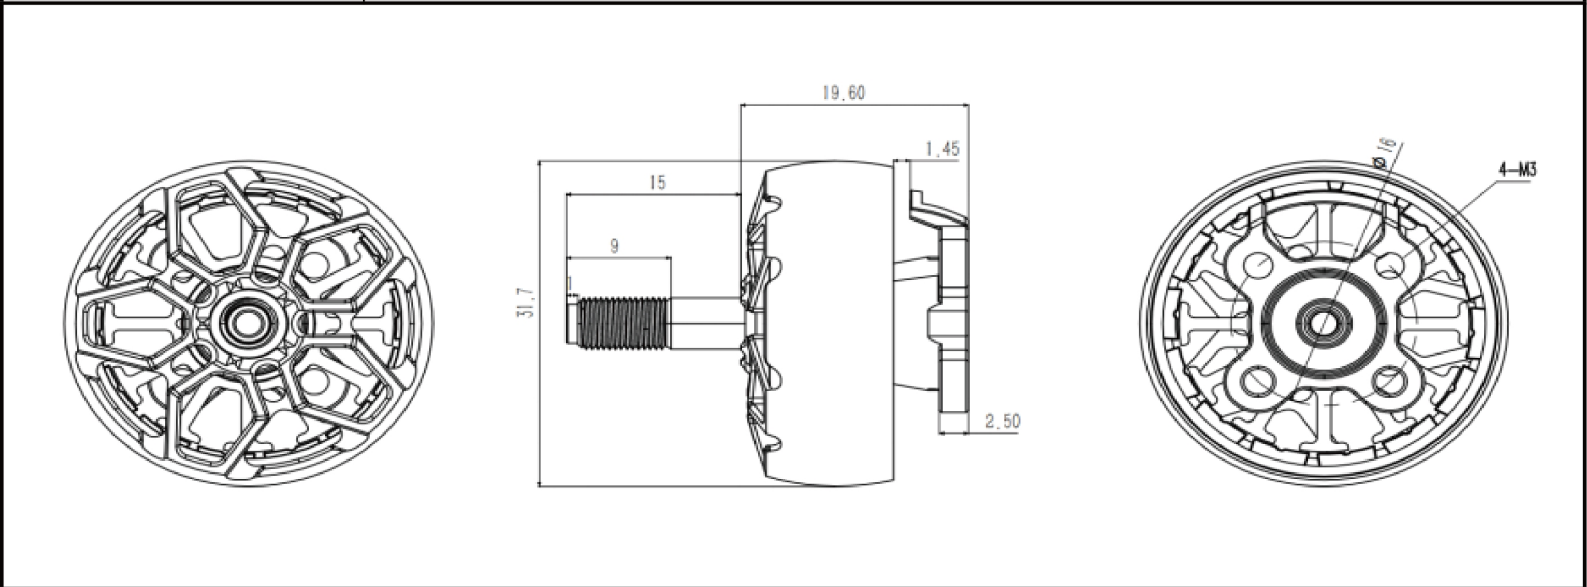

Datasheet								
Type	Prop (inch)	Throttle (%)	Voltages (V)	Load Curren (A)	Pull (g)	Power (W)	Efficiency (g/W)	Temperature
XING2 2506 1500KV	HQ 6*2.5*3	50%	25.17	5.57	532	140.2	3.792	82℃
		60%	25.14	8.90	761	223.7	3.401	
		70%	25.04	12.88	1006	322.5	3.120	
		80%	24.92	18.39	1293	458.3	2.822	
		90%	24.76	24.36	1558	603.2	2.583	
		100%	24.60	31.81	1860	782.5	2.376	
XING2 2506 1500KV	GEMFAN 6030-3	50%	25.19	6.33	594	159.5	3.723	80℃
		60%	25.12	9.82	829	246.7	3.359	
		70%	25.02	14.16	1080	354.3	3.047	
		80%	24.88	19.72	1352	490.6	2.756	
		90%	24.76	25.91	1607	641.5	2.505	
		100%	24.58	33.26	1872	817.5	2.289	