


XING2 3106 1200KV	
KV	1200KV
Weight (included wire)	58g
Dimension	Φ38.6*36.5mm
Interphase resistance	64.5mΩ
Input Volts	24V
Peak Current	63.01A
Max Watt	1512W
Mounting Holes	19*19-φ3mm
Rotor specifications	Unibell
Shaft Diameter	5mm
Shaft Protruding Length	15mm
Lead	260mm/18AWG
Magnet	N52H Curved
Configuration	12N14P
Bearing type	NSK
Bearing specs	φ11*φ5*5
Winding	Single strand copper winding
Package included	M3*8mm screw (4PCS) / M5 Flange Nut (1PC)

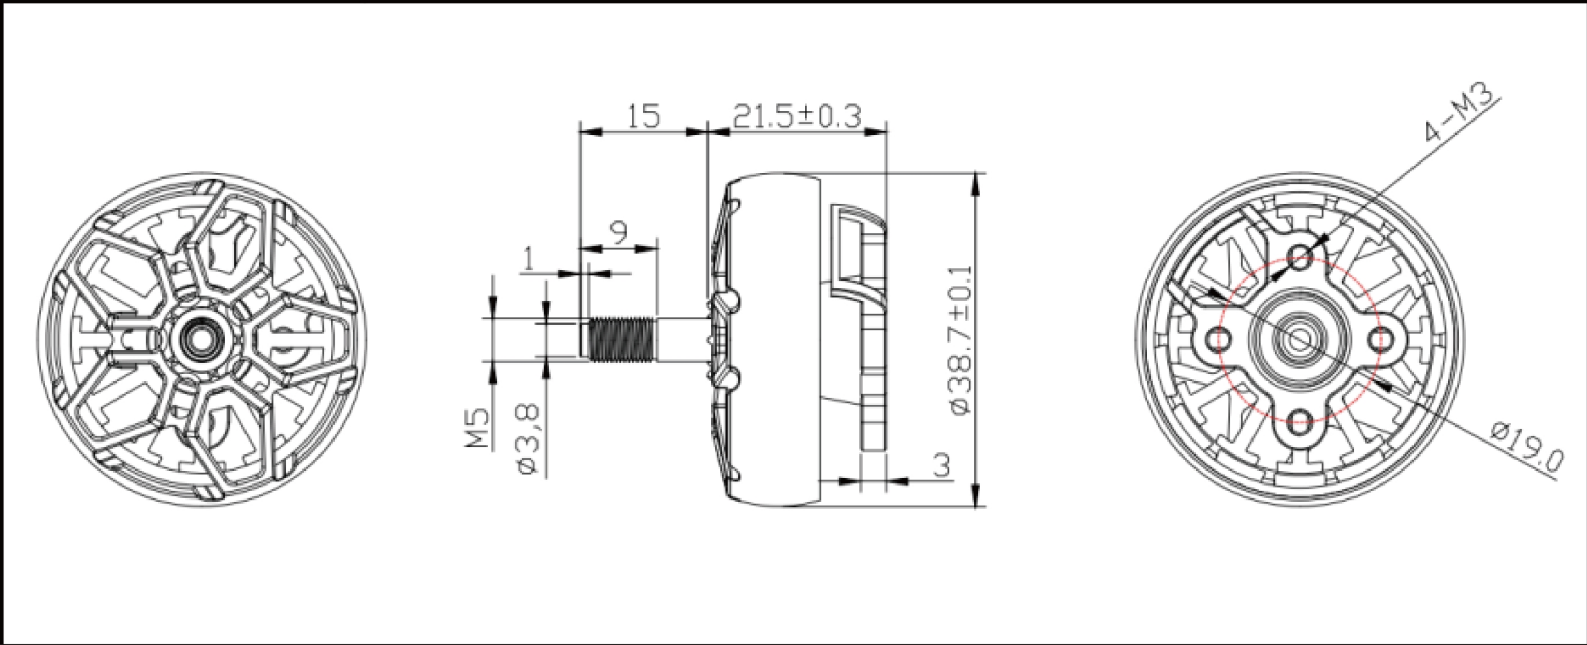

Datasheet								
Type	Prop (inch)	Throttle (%)	Voltages (V)	Load Curren (A)	Pull (g)	Power (W)	Efficiency (g/W)	Temperatur e
XING2 3106 1200KV	HQ 9*5*3	50%	24.0	11.11	963	267	3.612	85℃
		60%	24.0	19.01	1296	456	2.841	
		70%	24.0	32.19	1466	773	1.898	
		80%	24.0	43.64	1610	1047	1.537	
		90%	24.0	52.33	1828	1256	1.456	
		100%	24.0	63.01	2163	1512	1.430	