


XING2 3106 1500KV	
KV	1500KV
Weight (included wire)	58g
Dimension	Φ38.6*36.5mm
Interphase resistance	45.3mΩ
Input Volts	24V
Peak Current	68.5A
Max Watt	1644W
Mounting Holes	19*19-φ3mm
Rotor specifications	Unibell
Shaft Diameter	5mm
Shaft Protruding Length	15mm
Lead	260mm/18AWG
Magnet	N52H Curved
Configuration	12N14P
Bearing type	NSK
Bearing specs	φ11*φ5*5
Winding	Single strand copper winding
Package included	M3*8mm screw (4PCS) / M5 Flange Nut (1PC)

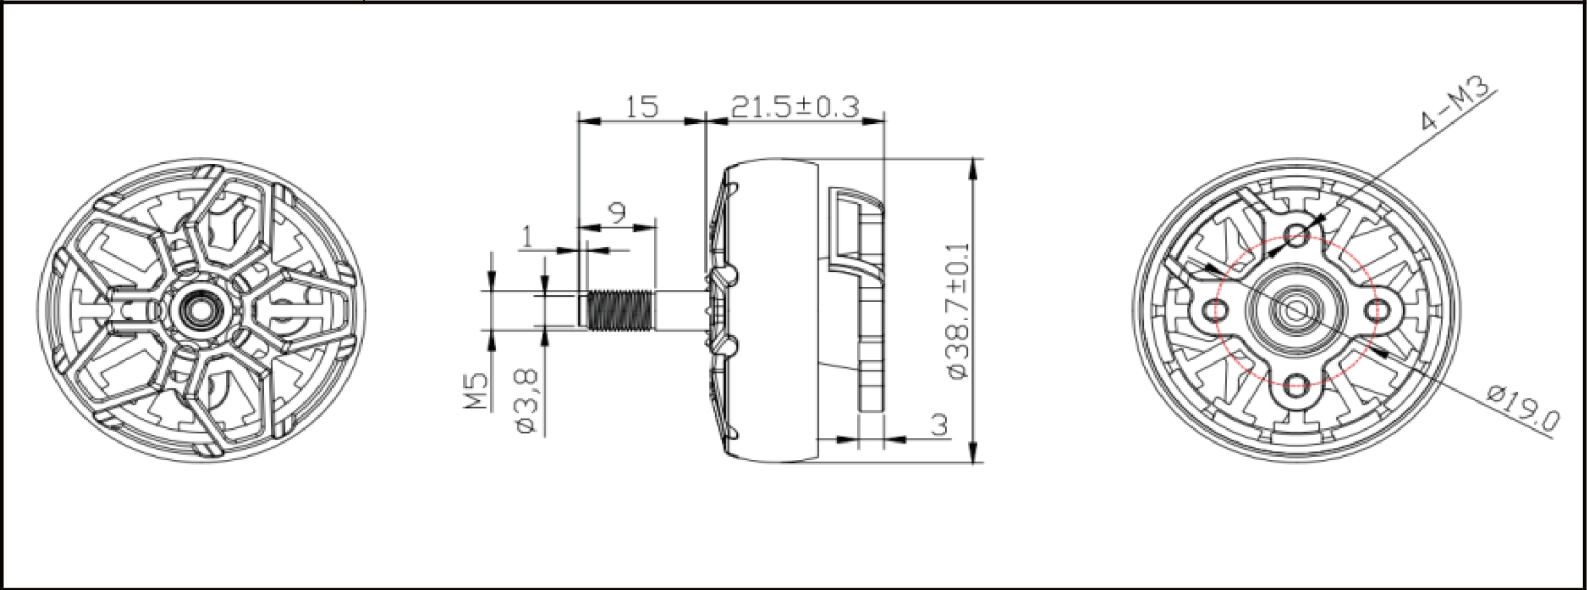

Datasheet								
Type	Prop (inch)	Throttle (%)	Voltages (V)	Load Curren (A)	Pull (g)	Power (W)	Efficiency (g/W)	Temperatur e
XING2 3106 1500KV	HQ 7*4*3	50%	24.0	8.24	662	198	3.347	82°C
		60%	24.0	14.46	973	347	2.804	
		70%	24.0	25.58	1400	614	2.280	
		80%	24.0	34.58	1691	830	2.038	
		90%	24.0	48.41	1968	1162	1.694	
		100%	24.0	62.3	2032	1495	1.359	
	HQ 8*4.5*3	50%	24.0	12.72	927	305	3.037	86°C
		60%	24.0	21.4	1246	514	2.426	
		70%	24.0	39.26	1480	942	1.571	
		80%	24.0	48.82	1789	1172	1.527	
		90%	24.0	58.63	1963	1407	1.395	
		100%	24.0	68.5	2168	1644	1.319	