


XING2 3110 1600KV	
KV	1600KV
Weight (included wire)	76.4g
Dimension	φ38.72*39.6mm
Interphase resistance	36mΩ
Input Volts	25.2V
Peak Current	65.06A
Max Watt	1550.4W
Mounting Holes	19*19-φ3mm
Rotor specifications	Unibell
Shaft Diameter	5mm
Shaft Protruding Length	15mm
Lead	260mm/18AWG
Magnet	N52H Curved
Configuration	12N14P
Bearing type	NSK
Bearing specs	φ11*φ5*5
Winding	Single strand copper winding
Package included	M3*10mm screw (4PCS) / M5 Flange Nut (1PC)

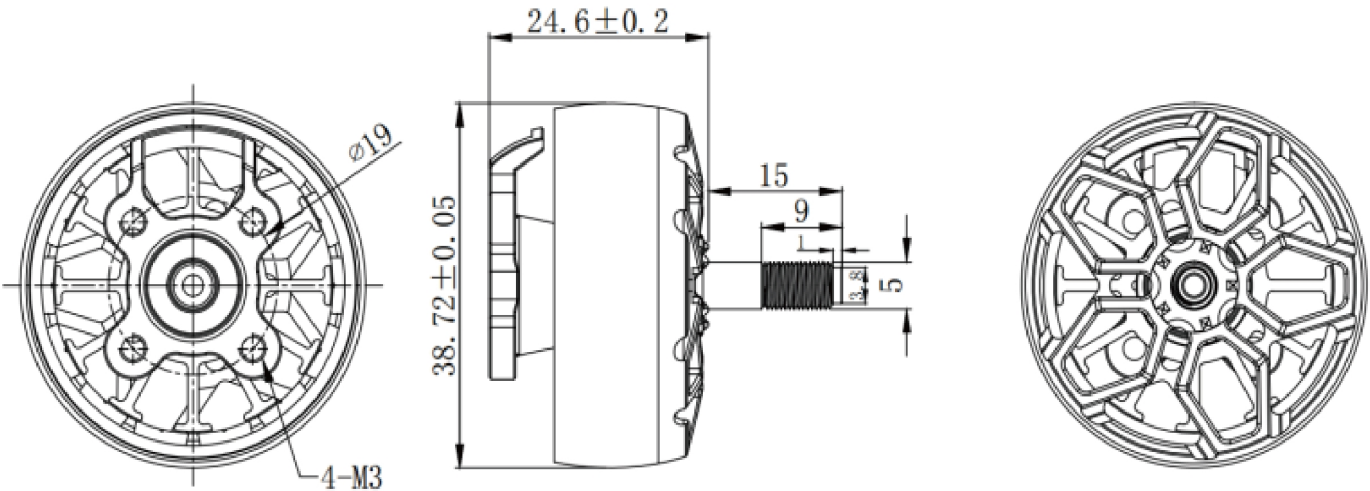

Datasheet								
Type	Prop (inch)	Throttle (%)	Voltages (V)	Load Curren (A)	Pull (g)	Power (W)	Efficiency (g/W)	Temperatur e
XING2 3110 1600KV	Nazgul 6*4*3	50%	25.07	12.14	907.4	292.3	3.20	73°C
		60%	24.92	18.39	1243.0	442.3	2.90	
		70%	24.71	27.22	1646.5	654.8	2.60	
		80%	24.44	38.31	2044.9	881.8	2.30	
		90%	24.19	50.22	2409.8	1204.2	2.10	
		100%	23.86	65.06	2829.2	1550.4	1.90	