


XING2 3110 900KV	
KV	900KV
Weight (included wire)	77g
Dimension	φ38.72*39.6mm
Interphase resistance	78mΩ
Input Volts	33.6V
Peak Current	65.54A
Max Watt	2143.8W
Mounting Holes	19*19-φ3mm
Rotor specifications	Unibell
Shaft Diameter	5mm
Shaft Protruding Length	15mm
Lead	260mm/18AWG
Magnet	N52H Curved
Configuration	12N14P
Bearing type	NSK
Bearing specs	φ11*φ5*5
Winding	Single strand copper winding
Package included	M3*10mm screw (4PCS) / M5 Flange Nut (1PC)

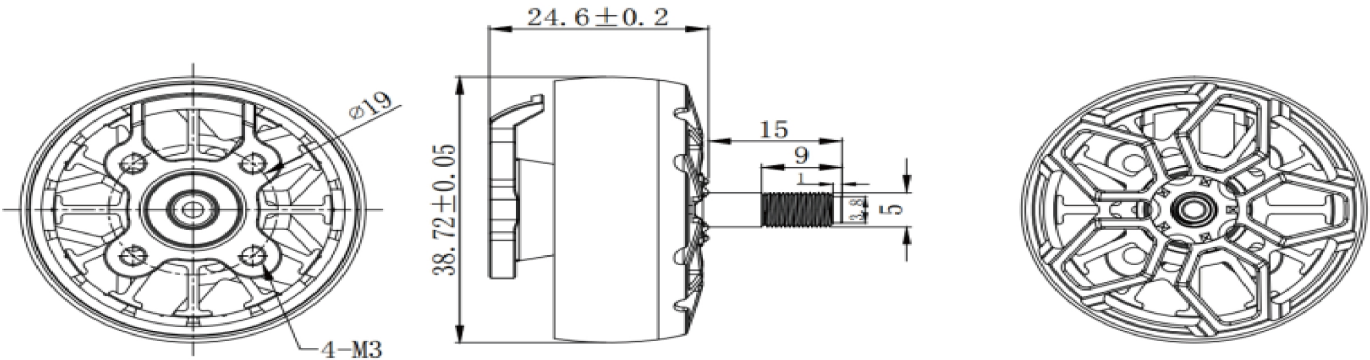

Datasheet								
Type	Prop (inch)	Throttle (%)	Voltages (V)	Load Current (A)	Pull (g)	Power (W)	Efficiency (g/W)	Temperature
XING2 3110 900KV	GF 7*4*3	50%	33.56	4.86	721.2	163.1	4.42	76℃
		60%	33.53	7.82	1036.0	262.2	3.95	
		70%	33.47	11.92	1411.9	399.0	3.54	
		80%	33.39	17.12	1844.6	571.6	3.23	
		90%	33.30	23.88	2250.8	795.2	2.83	
		100%	33.19	31.74	2612.3	1053.5	2.48	
	HQ 8*4*3	50%	33.51	9.05	1302.9	303.3	4.30	80℃
		60%	33.43	14.72	1780.0	492.1	3.62	
		70%	33.33	21.68	2317.1	722.6	3.21	
		80%	33.21	30.40	2970.5	1009.6	2.94	
		90%	33.05	41.91	3520.5	1385.1	2.54	
		100%	32.88	52.79	4013.8	1735.7	2.31	
	HQ 9*5*3	50%	33.48	11.34	1632.5	379.7	4.30	95℃
		60%	33.35	19.79	2178.6	660.0	3.30	
		70%	33.26	27.29	2872.4	907.7	3.16	
		80%	33.09	39.09	3509.0	1293.5	2.71	
		90%	32.92	50.99	4044.7	1678.6	2.41	
		100%	32.71	65.54	4311.4	2143.8	2.01	
	HQ10*5*3	50%	24.91	9.95	789	247.9	3.18	109℃
		60%	24.36	16.38	1191	399.0	2.98	
		70%	23.73	23.85	1639	566.0	2.90	
		80%	23.18	34.58	2193	801.6	2.74	
		90%	22.58	46.85	2768	1057.9	2.62	
		100%	21.86	49.85	2906	1089.7	2.67	