


XING2 3314 900KV	
KV	900KV
Weight (included wire)	129g
Dimension	φ41.9*46.8mm
Interphase resistance	36.5mΩ
Input Volts	24V
Peak Current	58.48A
Max Watt	1366.1W
Mounting Holes	19*19-φ3mm
Rotor specifications	Unibell
Shaft Diameter	5mm
Shaft Protruding Length	17mm
Lead	400mm/16AWG
Magnet	N52H Curved
Configuration	12N14P
Bearing type	NMB
Bearing specs	φ11*φ5*5
Winding	Single strand copper winding
Package included	M3*12mm screw (4PCS) / M5 Flange Nut (1PCS)

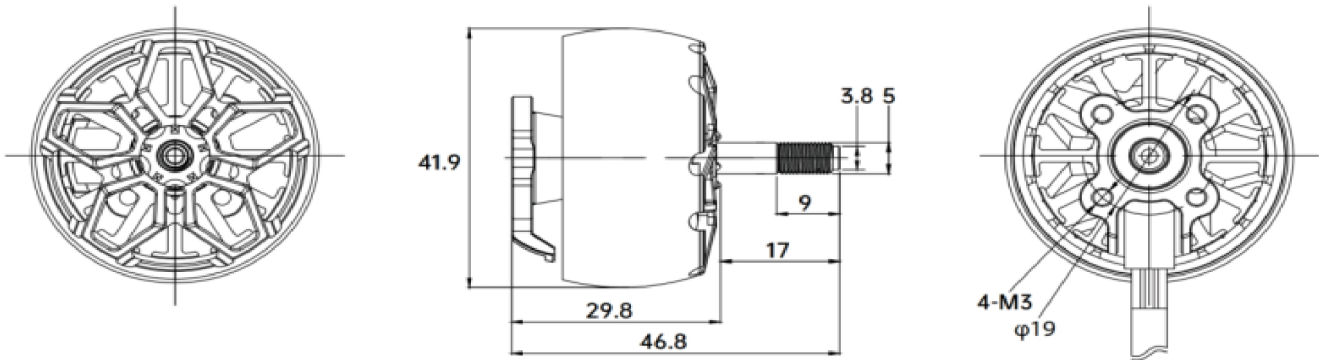

Datasheet								
Type	Prop (inch)	Throttle (%)	Voltages (V)	Load Curren (A)	Pull (g)	Power (W)	Efficiency (g/W)	Temperature
XING2 3314 900KV	HQ 8*4*3	50%	24.1	6.16	689	148.5	4.64	46℃
		60%	24.05	9.41	977	226.3	4.32	
		70%	23.98	13.57	1297	325.4	3.98	
		80%	23.91	18.79	1656	449.3	3.69	
		90%	23.82	25.07	2034	597.2	3.41	
		100%	23.74	30.28	2355	718.8	3.28	
	HQ 9*4*3	50%	24.06	8.34	956	200.7	4.76	74℃
		60%	24	12.73	1341	305.5	4.39	
		70%	23.92	18.32	1755	438.2	4	
		80%	23.81	25.59	2269	609.3	3.72	
		90%	23.69	34.2	2787	810.2	3.44	
		100%	23.59	41.44	3213	977.6	3.29	
	HQ 10*4.5*3	50%	24.02	11.79	1358	283.2	4.8	86℃
		60%	23.93	17.83	1972	426.7	4.62	
		70%	23.81	26.11	2558	621.7	4.12	
		80%	23.66	36.63	3191	866.7	3.68	
		90%	23.5	48.14	3633	1131.3	3.21	
		100%	23.36	58.48	4191	1366.1	3.07	